

General Description

The WSF20P03 is the highest performance trench P-Ch MOSFET with extreme high cell density, which provide excellent RDSON and gate charge for most of the small power switching and load switch applications.

The WSF20P03 meet the RoHS and Green Product requirement with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available


Product Summery

BVDSS	RDSON	ID
-30V	26mΩ	-27A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

TO-252 Pin Configuration



Absolute Maximum Ratings

		Ra	Rating	
Symbol	Parameter	10s	Steady State	Units
V_{DS}	Drain-Source Voltage	-	-30	
V_{GS}	Gate-Source Voltage	<u>±</u>	25	V
I _D @T _C =25℃	Continuous Drain Current, V _{GS} @ -10V ¹	-	27	Α
I _D @T _C =100°C	Continuous Drain Current, V _{GS} @ -10V ¹	-	-20	
I _D @T _A =25℃	Continuous Drain Current, V _{GS} @ -10V ¹	-9	-8.5	Α
I _D @T _A =70°C	Continuous Drain Current, V _{GS} @ -10V ¹	-8	-7.4	Α
I _{DM}	Pulsed Drain Current ²	-(-60	
EAS	Single Pulse Avalanche Energy ³	9	93	
I _{AS}	Avalanche Current	-	-25	
P _D @T _C =25℃	Total Power Dissipation ⁴	:	25	
P _D @T _A =25℃	Total Power Dissipation⁴	3.5	2.0	W
T _{STG}	Storage Temperature Range	-55	-55 to 150	
TJ	Operating Junction Temperature Range	-55	-55 to 150	

Thermal Data

Symbol	Parameter	Тур.	Max.	Unit
$R_{ heta JA}$	Thermal Resistance Junction-Ambient ¹		62	°C/W
$R_{ heta JA}$	Thermal Resistance Junction-Ambient ¹ (t ≤10s)		25	°C/W
$R_{ heta JC}$	Thermal Resistance Junction-Case ¹		2.8	°C/W



Electrical Characteristics (T_J=25 C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V_{GS} =0V , I_D =-250uA	-30			V
$\triangle BV_{DSS}/\triangle T_{J}$	BV _{DSS} Temperature Coefficient	Reference to 25℃, I _D =-1mA		-0.022		V/°C
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V_{GS} =-10V , I_D =-5A		26	32	mΩ
		V_{GS} =-4.5V , I_D =-4A		36	45	
V _{GS(th)}	Gate Threshold Voltage	\/ =\/ = 250\	-1.0	-1.5	-2.5	V
$\triangle V_{GS(th)}$	V _{GS(th)} Temperature Coefficient	$V_{GS}=V_{DS}$, $I_D=-250uA$		4.6		mV/℃
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-24V , V _{GS} =0V , T _J =25°C			-1	uA
		V _{DS} =-24V , V _{GS} =0V , T _J =55°C			-5	
I _{GSS}	Gate-Source Leakage Current	V_{GS} = $\pm 20 V$, V_{DS} = $0 V$			±100	nA
gfs	Forward Transconductance	V _{DS} =-5V , I _D =-5A		17		S
R_g	Gate Resistance	V_{DS} =0V , V_{GS} =0V , f=1MHz		13	26	Ω
Q_{g}	Total Gate Charge (-4.5V)	V _{DS} =-15V , V _{GS} =-4.5V , I _D =-5A		12.6	17.6	
Q_gs	Gate-Source Charge			4.8	6.7	nC
Q_gd	Gate-Drain Charge			4.5	5.7	1
T _{d(on)}	Turn-On Delay Time	V_{DD} =-15V , V_{GS} =-10V , R_{G} =3.3 Ω , I_{D} =-5A		4.6	9.2	
T _r	Rise Time			14.8	26.6	
T _{d(off)}	Turn-Off Delay Time			41	82	ns
T _f	Fall Time			19.6	39.2	
C _{iss}	Input Capacitance	V _{DS} =-15V , V _{GS} =0V , f=1MHz		1345	1883	
Coss	Output Capacitance			194	272	pF
C _{rss}	Reverse Transfer Capacitance			158	221	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
Is	Continuous Source Current ^{1,4}	V =V =0V Force Current			-5.8	Α
I _{SM}	Pulsed Source Current ^{2,4}	V _G =V _D =0V , Force Current			-24	Α
V_{SD}	Diode Forward Voltage ²	V _{GS} =0V , I _S =-1A , T _J =25℃			-1.2	V
t _{rr}	Reverse Recovery Time			16.3		nS
Q_{rr}	Reverse Recovery Charge	lF=-5A,dl/dt=100A/µs,T _J =25℃		5.9		nC

Note:

- 1. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper,t<10sec.
- 2.The data tested by pulsed , pulse width \leq 300us , duty cycle \leq 2%
- 3.The power dissipation is limited by 150 $^{\circ}\mathrm{C}$ junction temperature
- 4. The data is theoretically the same as I_D and I_{DM} , in real applications, should be limited by total power dissipation.



Typical Characteristics

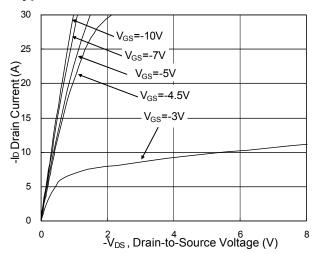


Fig.1 Typical Output Characteristics

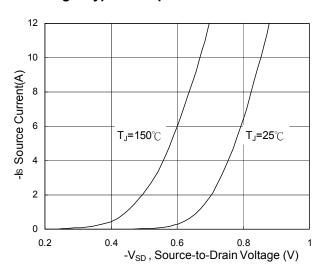


Fig.3 Forward Characteristics of Reverse

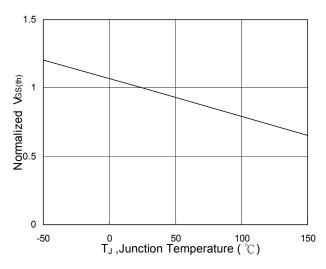


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

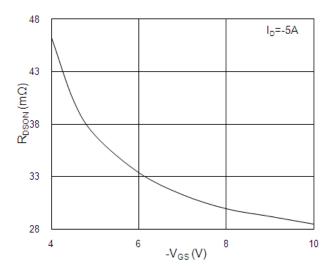


Fig.2 On-Resistance v.s Gate-Source

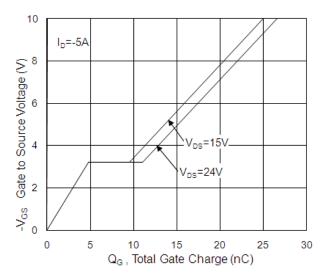


Fig.4 Gate-Charge Characteristics

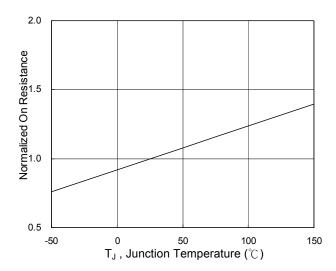
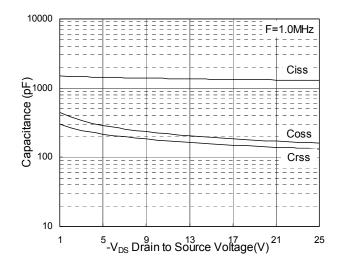


Fig.6 Normalized R_{DSON} vs. T_J





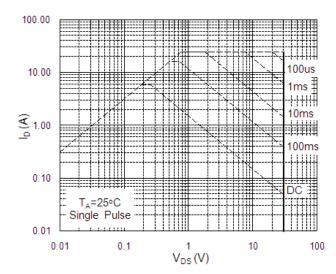


Fig.7 Capacitance

Fig.8 Safe Operating Area



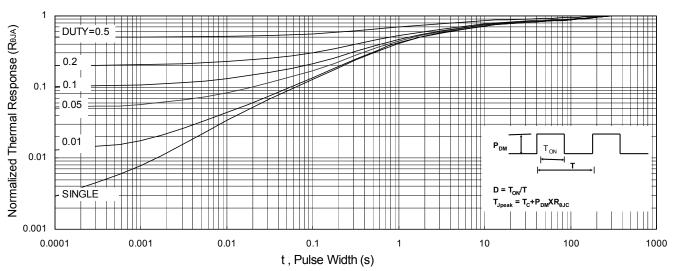


Fig.9 Normalized Maximum Transient Thermal Impedance

-V_{GS}

4.5V

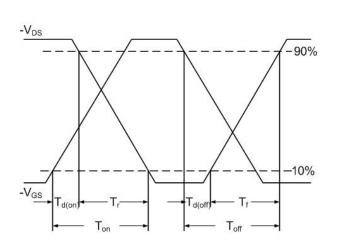



Qgs

Qg

Qgd

Fig.10 Switching Time Waveform

Fig.11 Gate Charge Waveform

Charge



Attention

- 1, Any and all Winsok power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Winsok power representative nearest you before using any Winsok power products described or contained herein in such applications.
- 2, Winsok power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Winsok power products described or contained herein.
- 3, Specifications of any and all Winsok power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- 4, Winsok power Semiconductor CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- 5,In the event that any or all Winsok power products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- 6, No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Winsok power Semiconductor CO., LTD.
- 7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Winsok power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- 8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Winsok power product that you Intend to use.
- 9, this catalog provides information as of Sep.2014. Specifications and information herein are subject to change without notice.