



LBC847BWT1G

S-LBC847BWT1G

NPN Silicon General Purpose Transistors

1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.



2. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LBC847BWT1G	1F	3000/Tape&Reel
LBC847BWT3G	1F	10000/Tape&Reel

3. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Collector–Emitter Voltage	VCEO	45	V
Collector–Base Voltage	VCBO	50	V
Emitter–Base Voltage	VEBO	6	V
Collector Current(Continuous)	IC	100	mA
Junction temperature	TJ	–55 ~ +150	°C
Storage temperature	Tstg	–55 ~ +150	°C

4. THERMAL CHARACTERISTICS





Parameter	Symbol	Limits	Unit
Total Device Dissipation, FR-4 Board (Note 1) @ TA = 25°C Derate above 25°C	PD	300 2.4	mW mW/°C
Thermal Resistance, Junction–to–Ambient(Note 1)	ROJA	417	°C/W

1. 30.0mm×25.0mm×1.6mm(FR4), Copper foil thickness 35μm;




5. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

Characteristic	Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage (IC = 10 mA)	V(BR)CEO	45	-	-	V
Collector–Emitter Breakdown Voltage (IC = 10 μ A, VEB = 0)	V(BR)CES	50	-	-	V
Collector–Base Breakdown Voltage (IC = 10 μ A)	V(BR)CBO	50	-	-	V
Emitter–Base Breakdown Voltage (IE = 1.0 μ A)	V(BR)EBO	6	-	-	V
Collector Cutoff Current (VCB = 30 V) (VCB = 30 V, TA = 150°C)	ICBO	- -	- -	15 5	nA μ A
ON CHARACTERISTICS					
DC Current Gain (IC = 2.0 mA, VCE = 5.0 V)	hFE	200	290	450	
Collector–Emitter Saturation Voltage (IC = 10 mA, IB = 0.5 mA) (IC = 100 mA, IB = 5.0 mA)	VCE(sat)	- -	- -	0.25 0.6	V
Base–Emitter Saturation Voltage (IC = 10 mA, IB = 0.5 mA) (IC = 100 mA, IB = 5.0 mA)	VBE(sat)	- -	0.7 0.9	- -	V
Base–Emitter Voltage (IC = 2.0 mA, VCE = 5.0 V) (IC = 10 mA, VCE = 5.0 V)	VBE(on)	580 -	660 -	700 770	mV
SMALL–SIGNAL CHARACTERISTICS					
Current–Gain — Bandwidth Product (IC = 10 mA, VCE = 5.0 V, f = 100 MHz)	fT	100	-	-	MHz
Output Capacitance (VCB = 10 V, f = 1.0 MHz)	Cobo	-	-	4.5	pF
Noise Figure(IC = 0.2 mA,VCE = 5.0 V, RS = 2.0 k Ω , f = 1.0 KHz, BW = 200 Hz)	NF	-	-	10	dB


6.ELECTRICAL CHARACTERISTICS CURVES

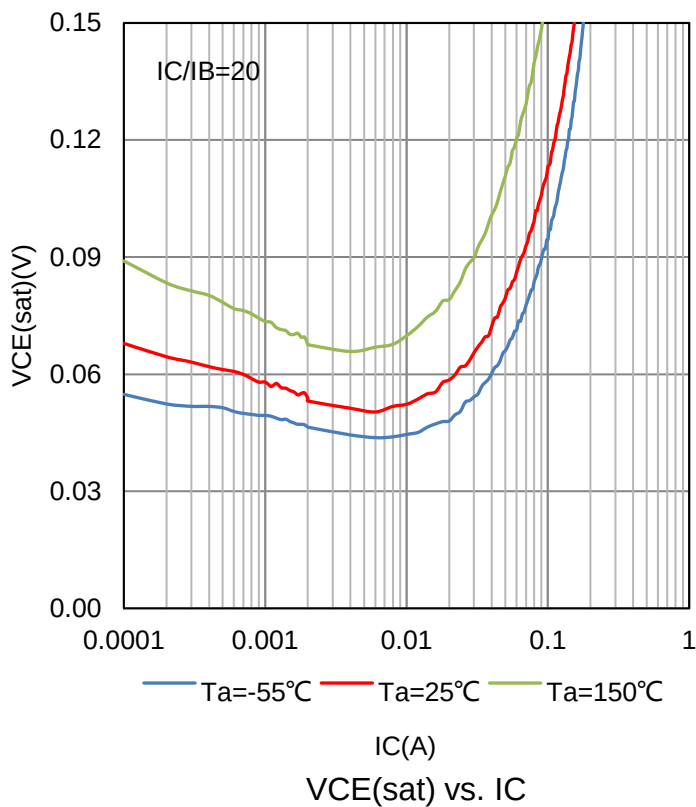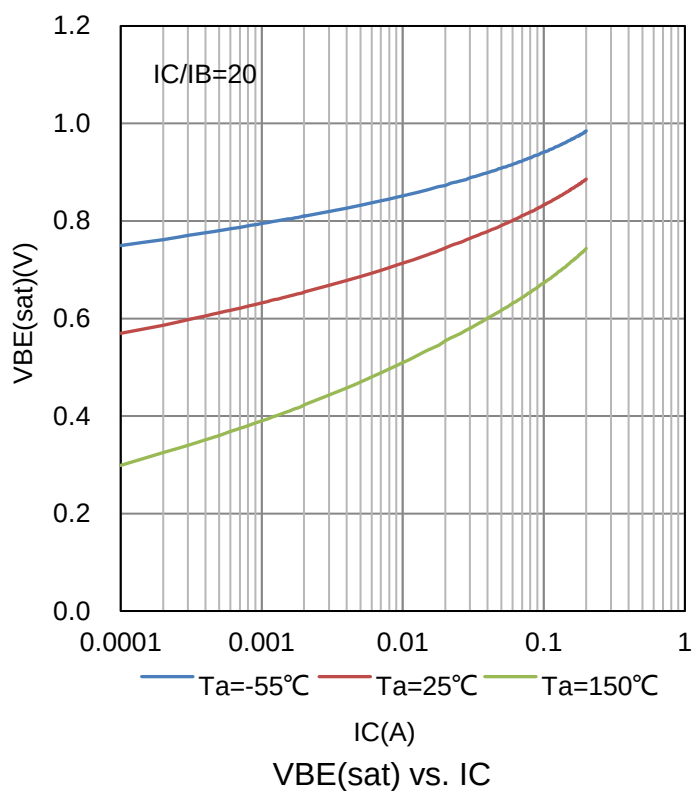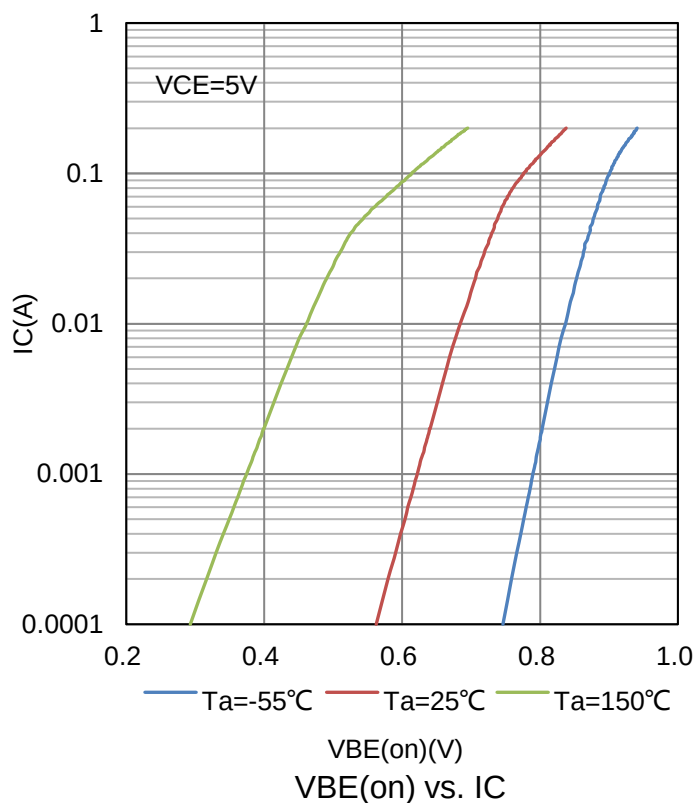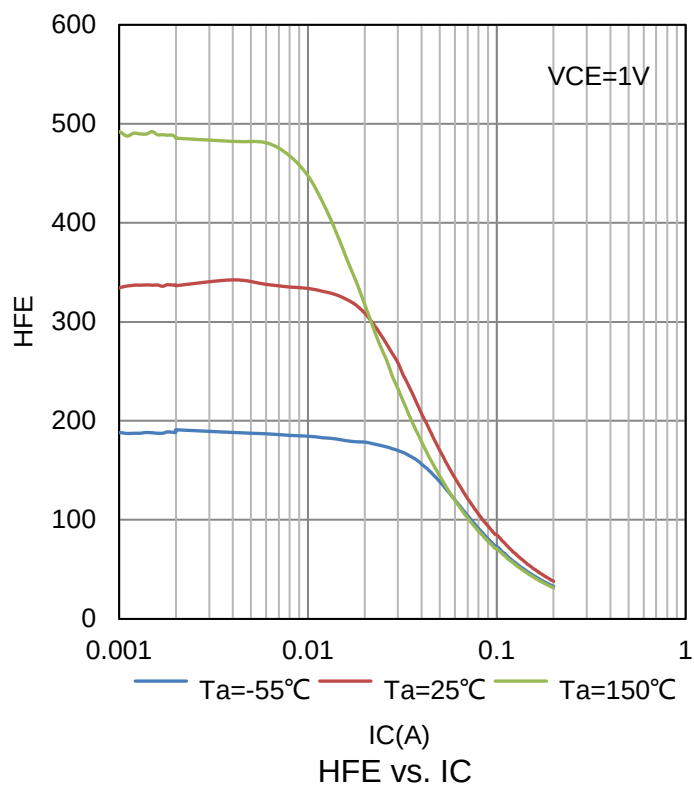

6.ELECTRICAL CHARACTERISTICS CURVES(Con.)

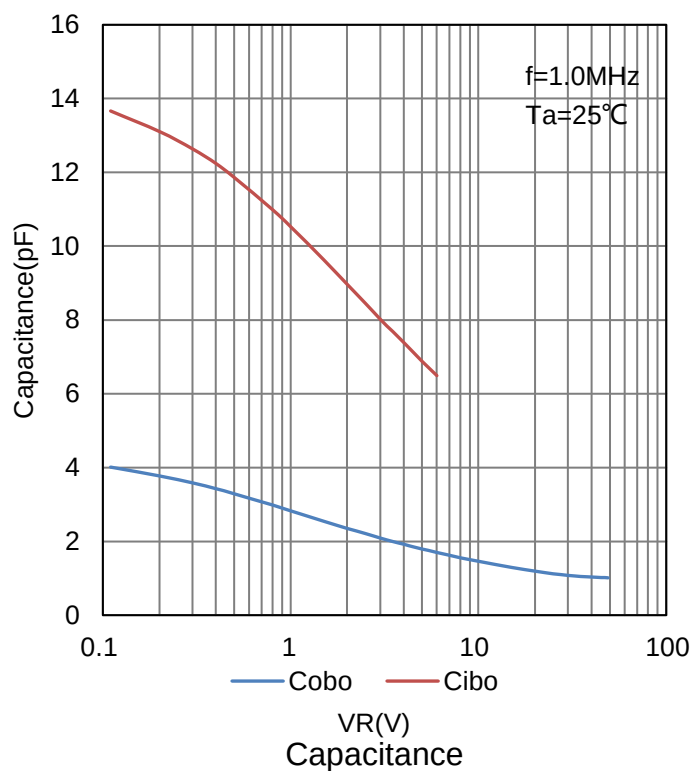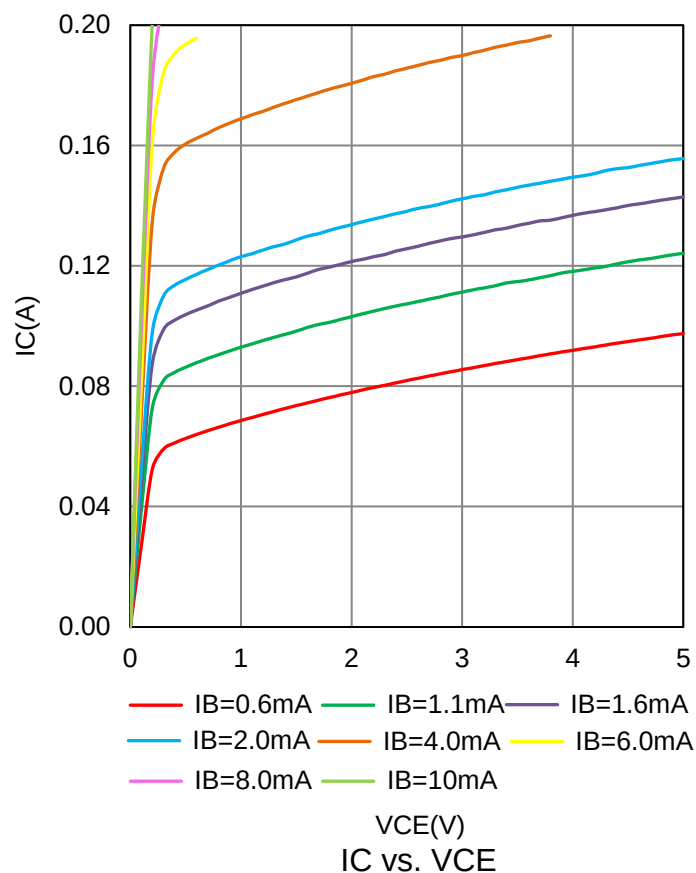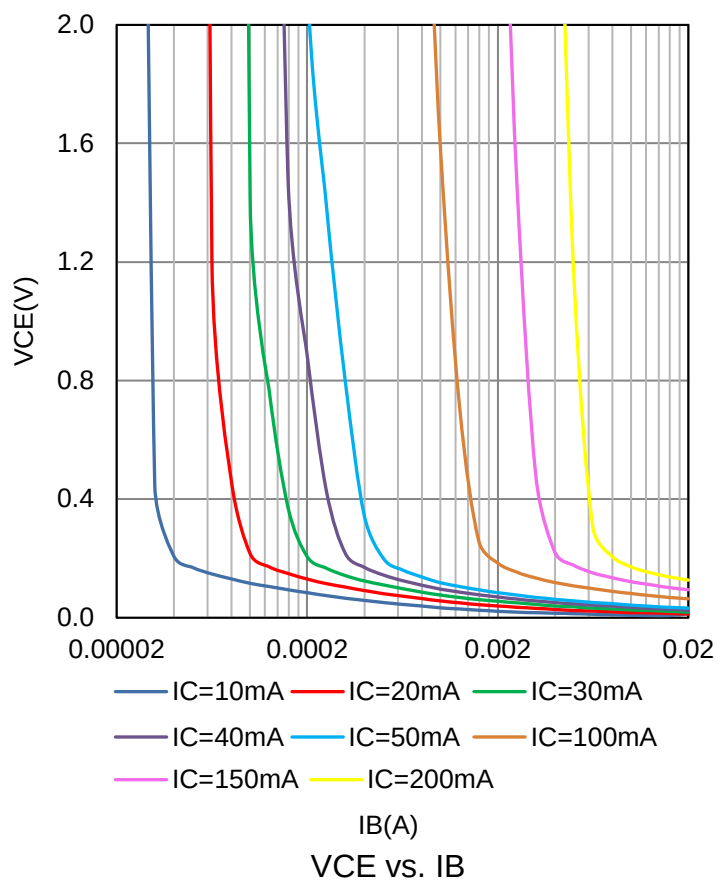


7.OUTLINE AND DIMENSIONS

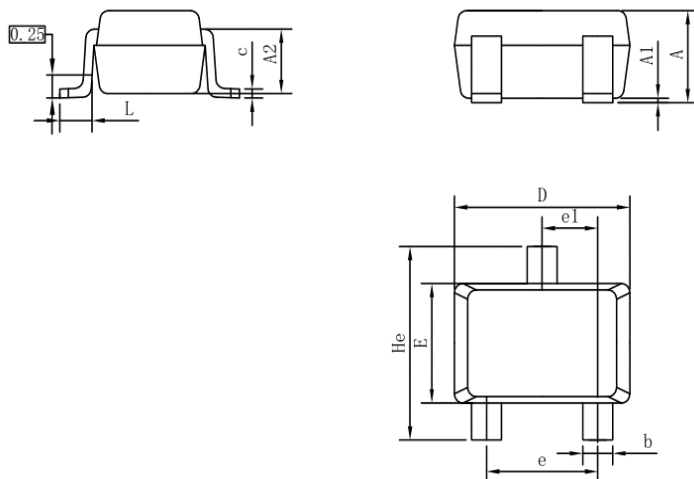

SC70			
DIM	MIN	NOR	MAX
A	0.80	0.95	1.00
A1	0.00	0.05	0.10
A2	0.7 REF		
b	0.30	0.35	0.40
c	0.10	0.15	0.25
D	1.80	2.05	2.20
E	1.15	1.30	1.35
e	1.20	1.30	1.40
e1	0.65 BSC		
L	0.20	0.35	0.56
He	2.00	2.10	2.40
ALL Dimension in mm			

8.SOLDERING FOOTPRINT

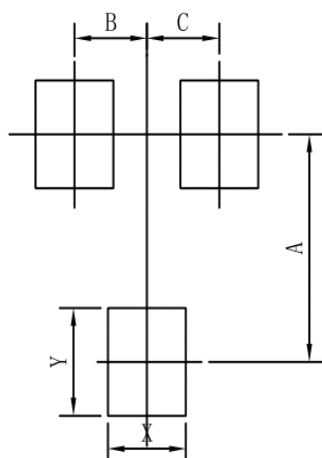

SC70	
DIM	MIN
A	1.90
B	0.65
C	0.65
X	0.70
Y	0.90

DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.