



Features


- Epitaxial Planar Die Construction
- Complementary NPN Type Available(TPMMDT5551)
- Ideal for Medium Power Amplification and Switching

Ordering Information

- Shipping Qty:3000/7inch Tape& Reel



Circuit Diagram

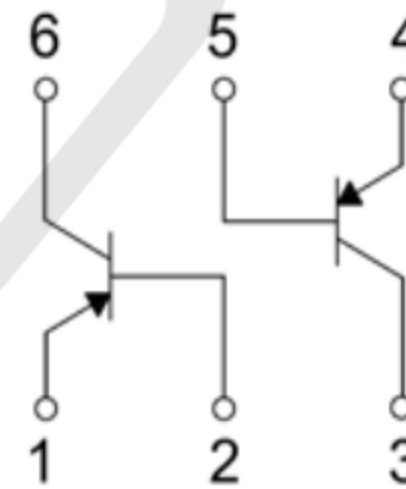

Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Symbol	Parameter	Value	Units
V _{CBO}	Collector- Base Voltage	-160	V
V _{CEO}	Collector-Emitter Voltage	-150	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _c	Collector Current -Continuous	-0.2	A
P _c	Collector Power Dissipation	0.2	W
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C





Electrical Characteristics (TA=25°C unless otherwise specified)

www.sot23.com.tw

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-160			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -1mA, I_B = 0$	-150			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -120V, I_E = 0$			-0.05	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -3V, I_C = 0$			-0.05	μA
DC current gain	$h_{FE(1)}$	$V_{CE} = -5V, I_C = -1mA$	50			
	$h_{FE(2)}$	$V_{CE} = -5V, I_C = -10mA$	100		300	
	$h_{FE(3)}$	$V_{CE} = -5V, I_C = -50mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = -10mA, I_B = -1mA$			-0.2	V
	$V_{CE(sat)2}$	$I_C = -50mA, I_B = -5mA$			-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = -10mA, I_B = -1mA$			-1	V
	$V_{BE(sat)2}$	$I_C = -50mA, I_B = -5mA$			-1	V
Transition frequency	f_T	$V_{CE} = -10V, I_C = -10mA, f = 100MHz$	100			MHz
Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$			6	pF
Noise Figure	NF	$V_{CE} = -5.0V, I_C = -200\mu A, R_S = 10\Omega, f = 1.0kHz$			8.0	dB







Typical Performance Characteristics (TA=25°C unless otherwise Specified)

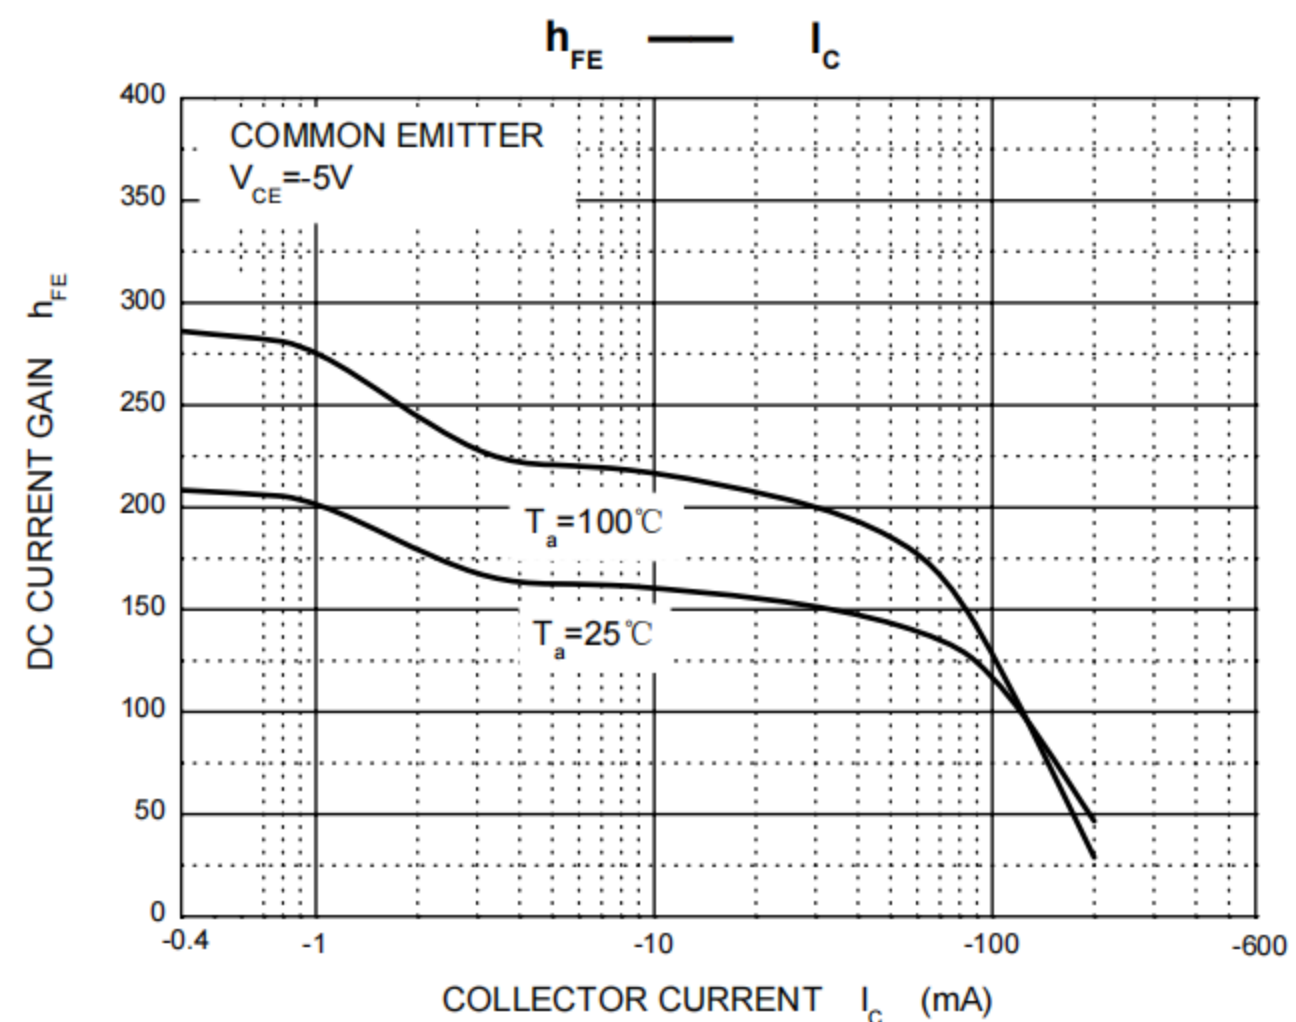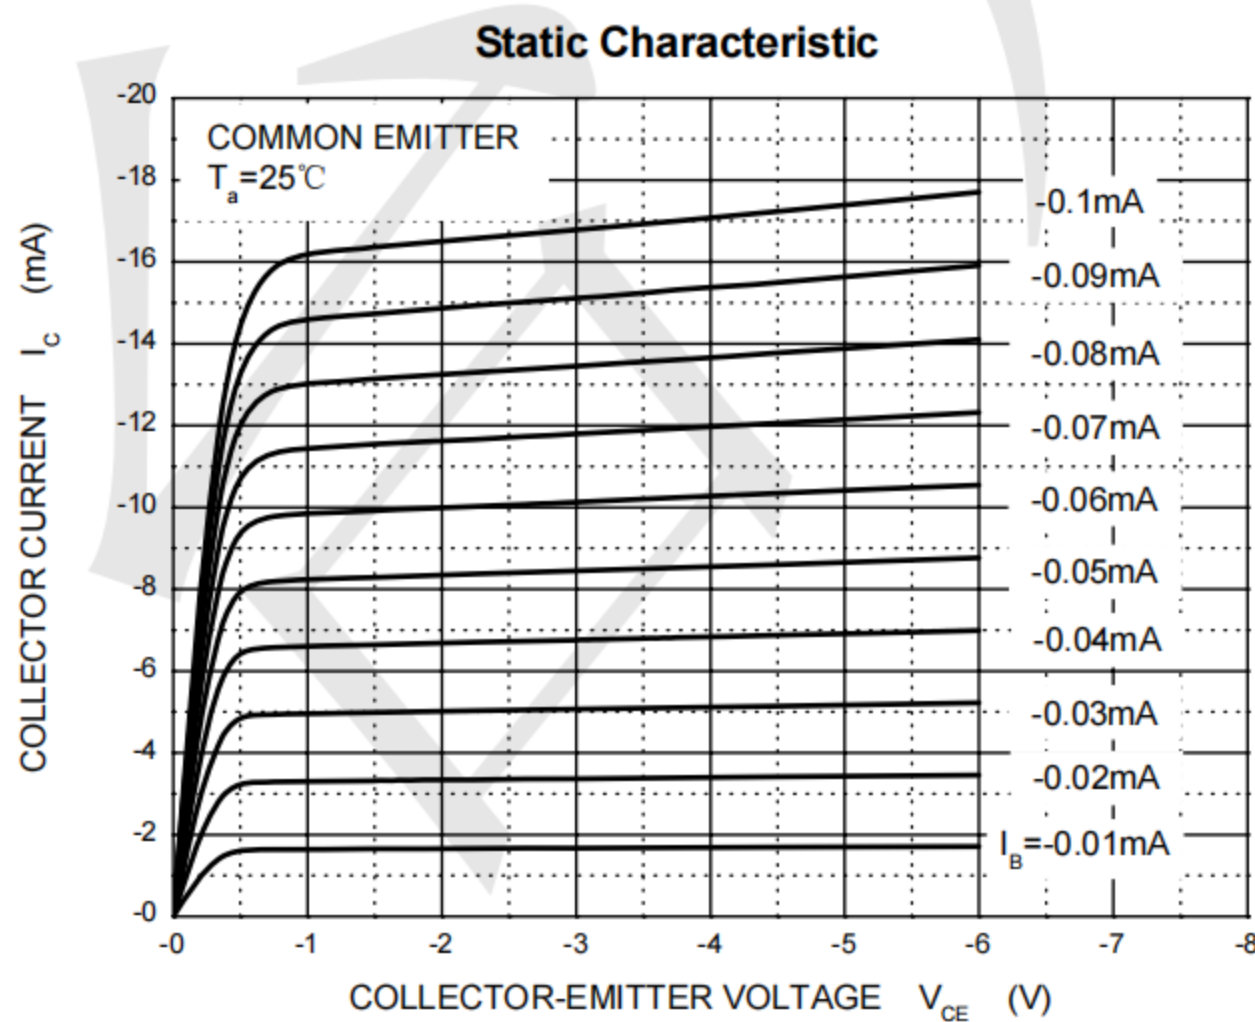




Typical Performance Characteristics (T_A=25°C unless otherwise Specified)

www.sot23.com.tw

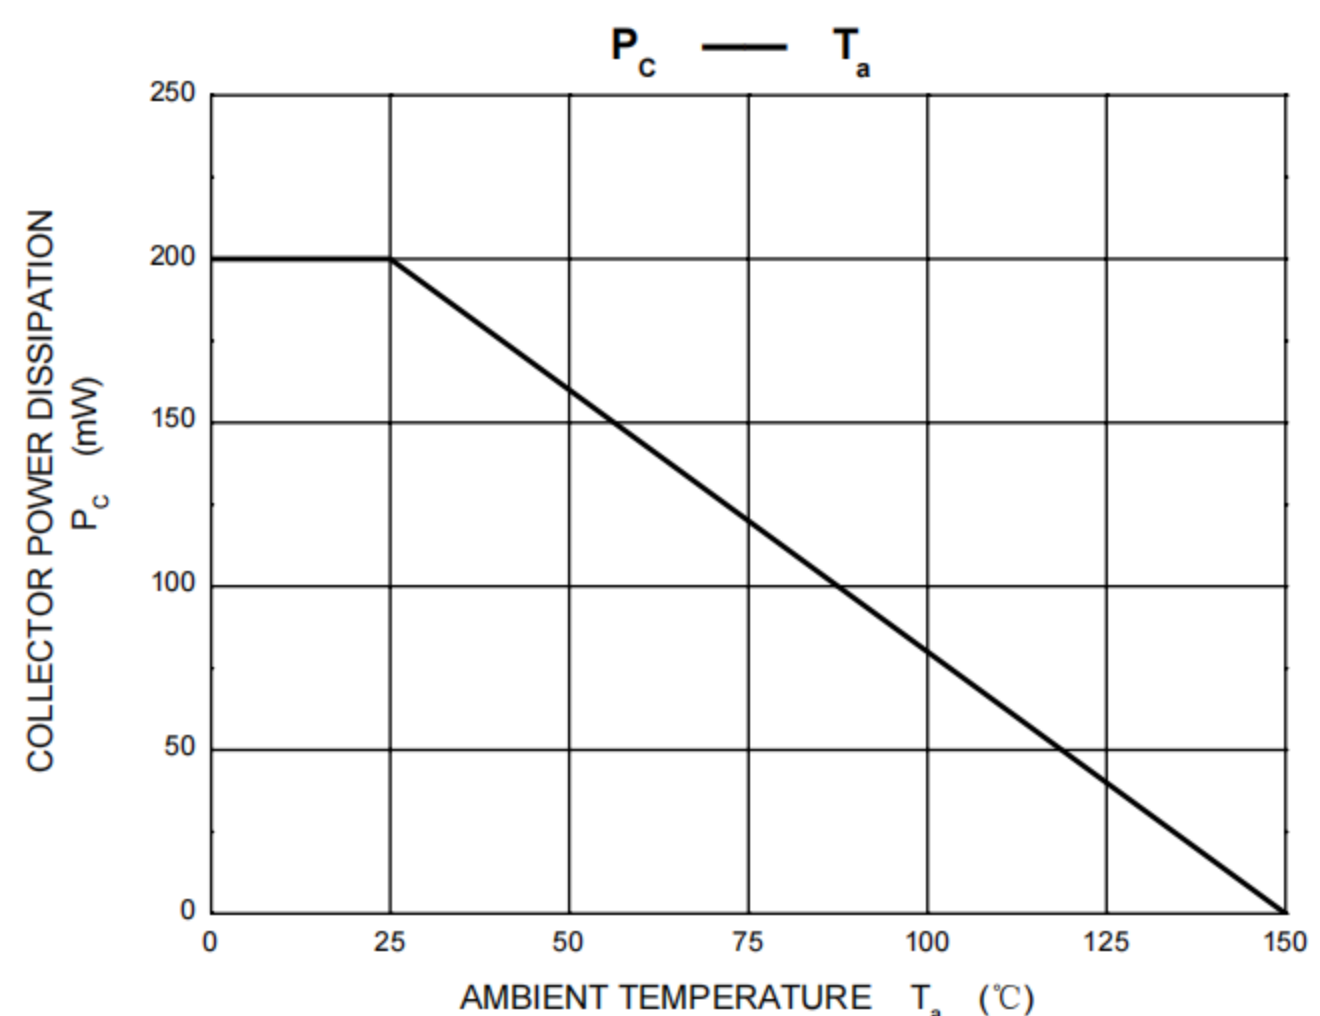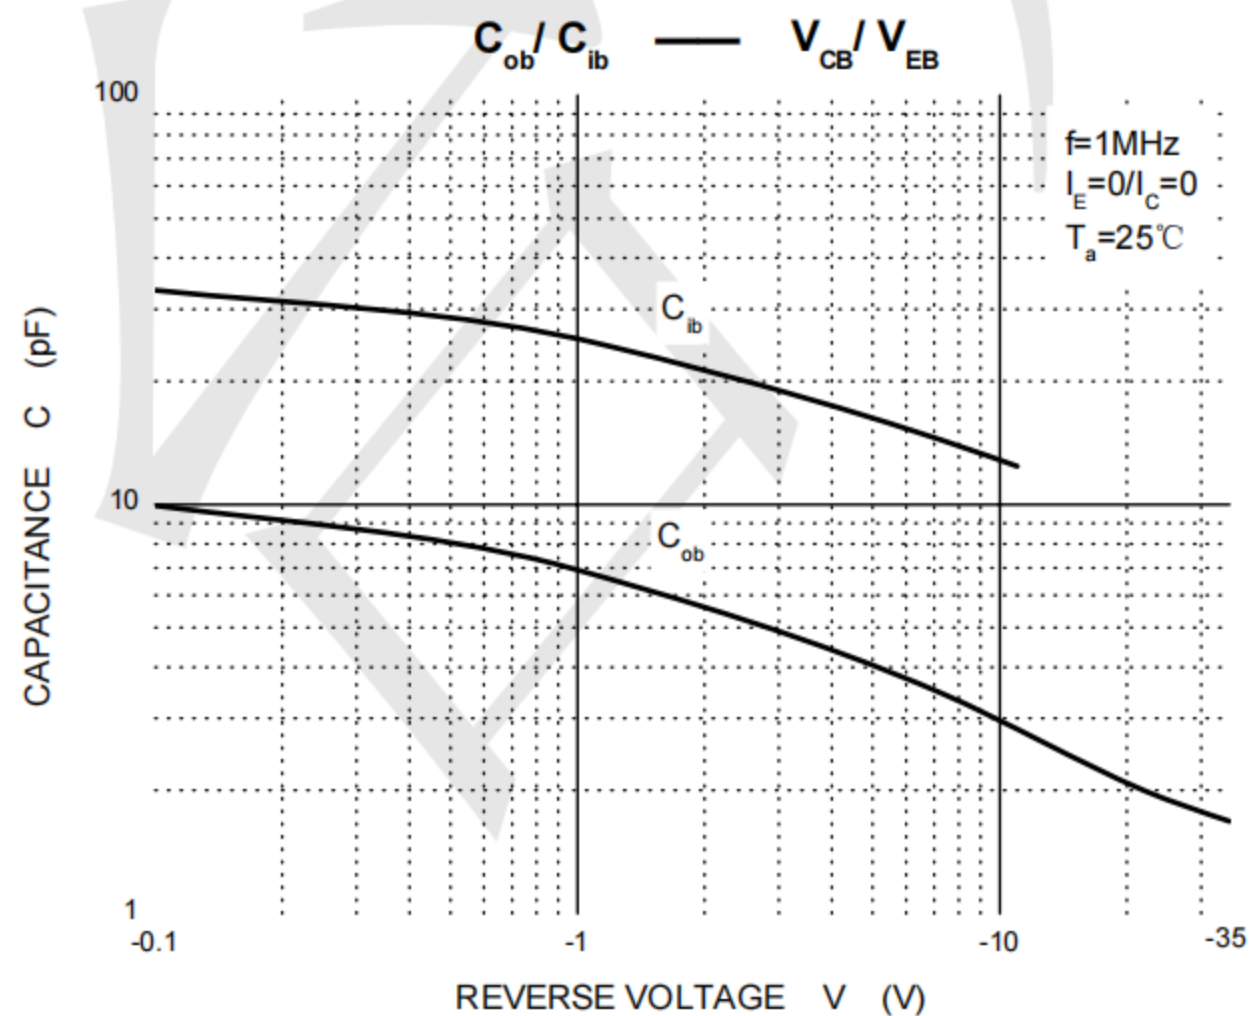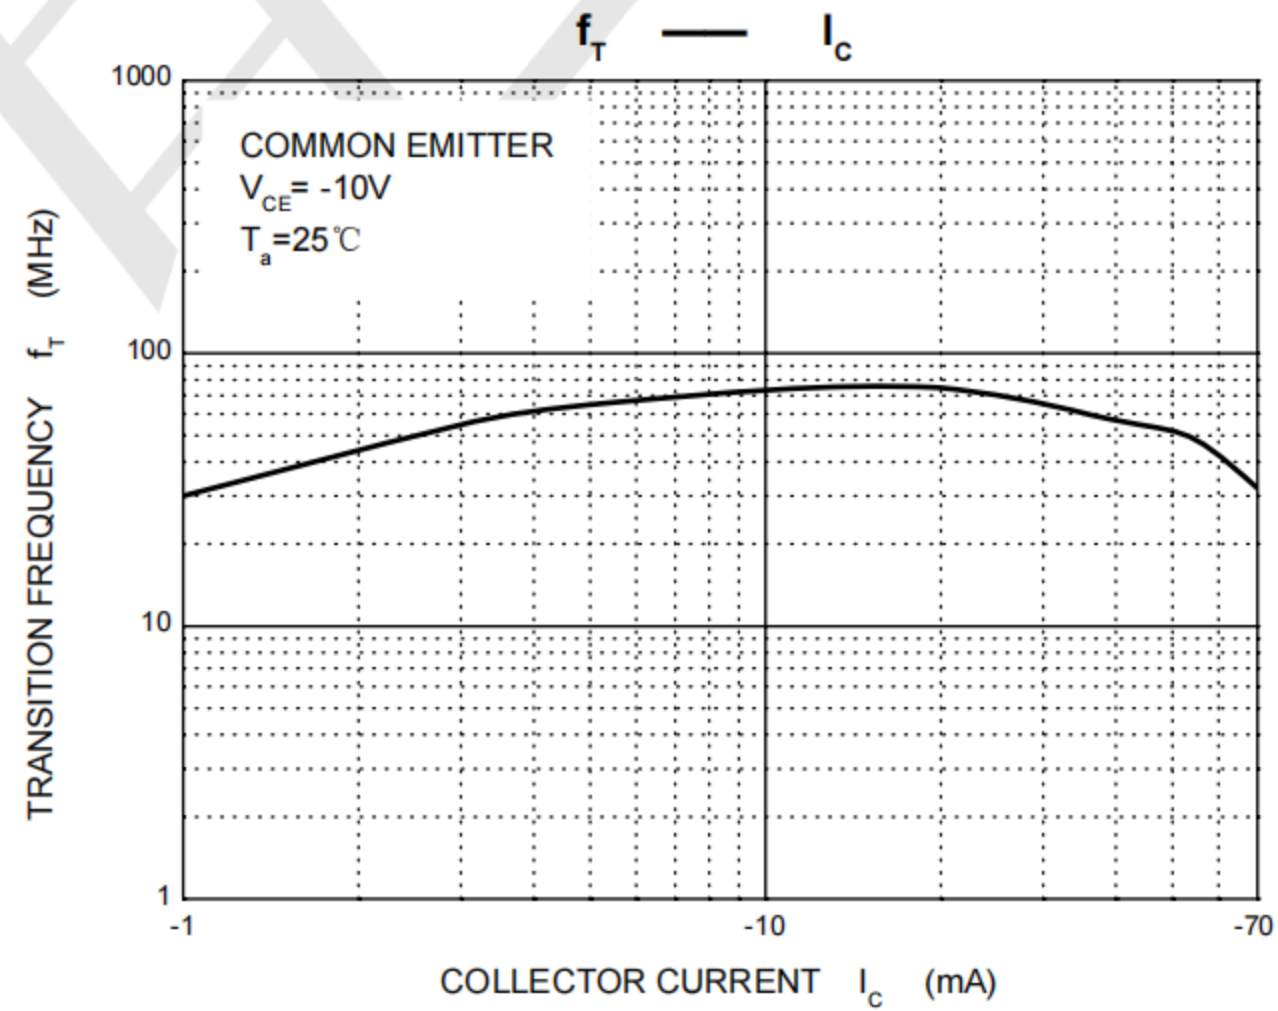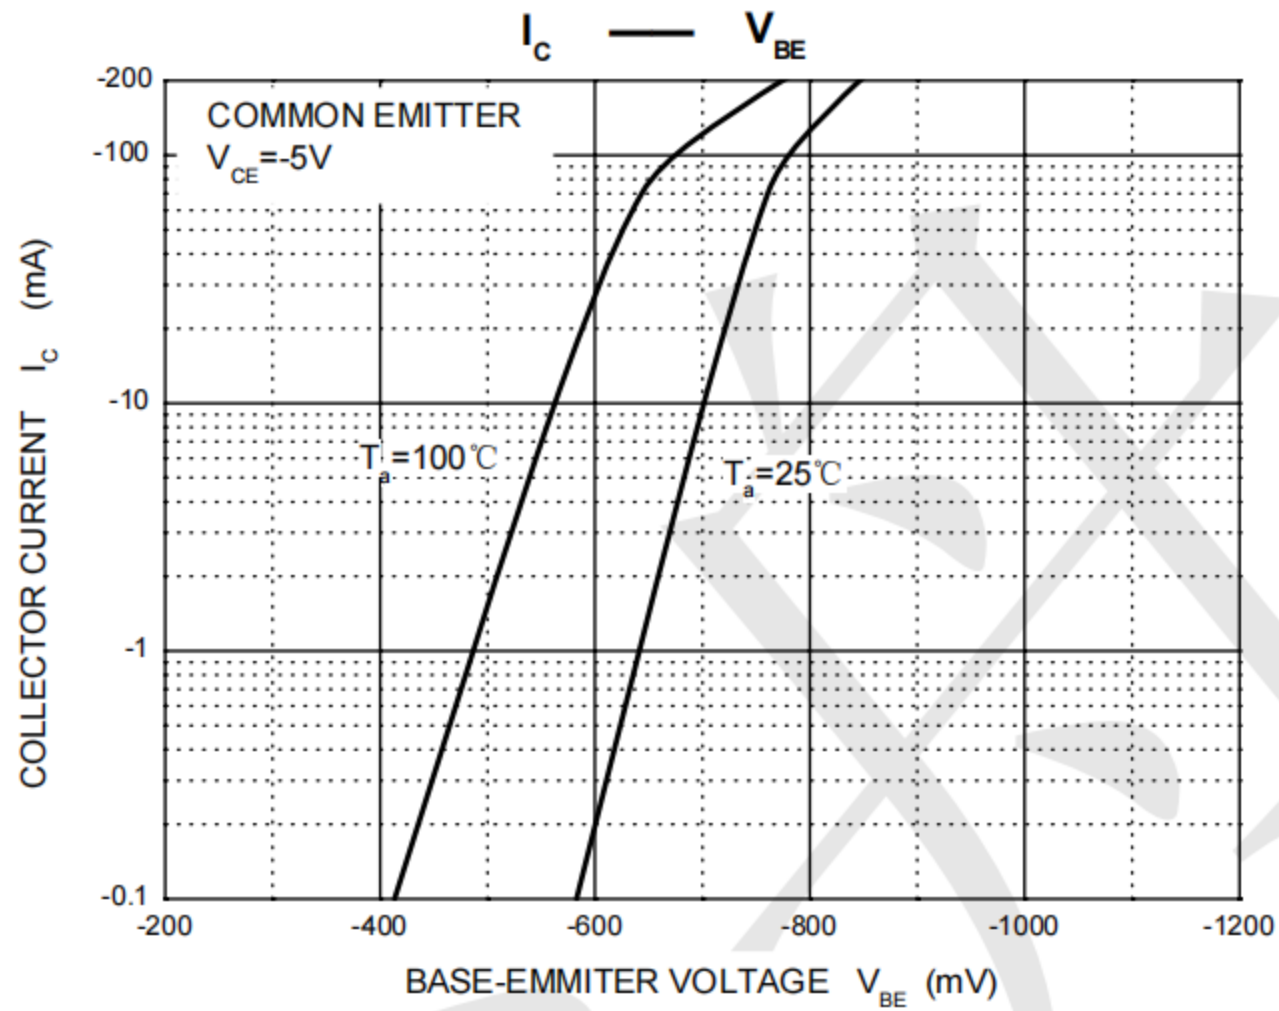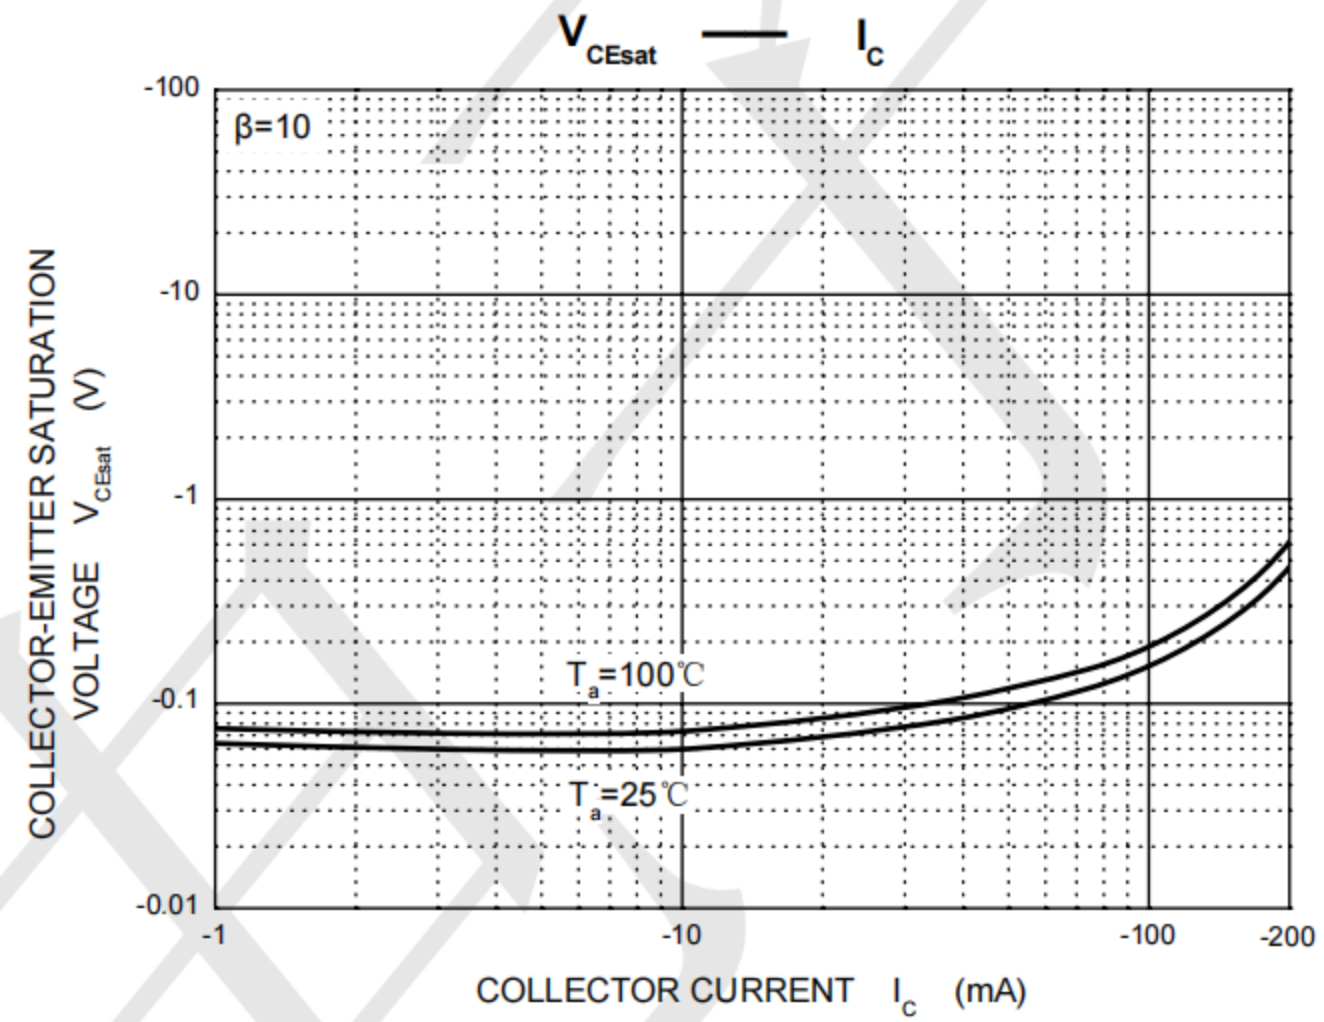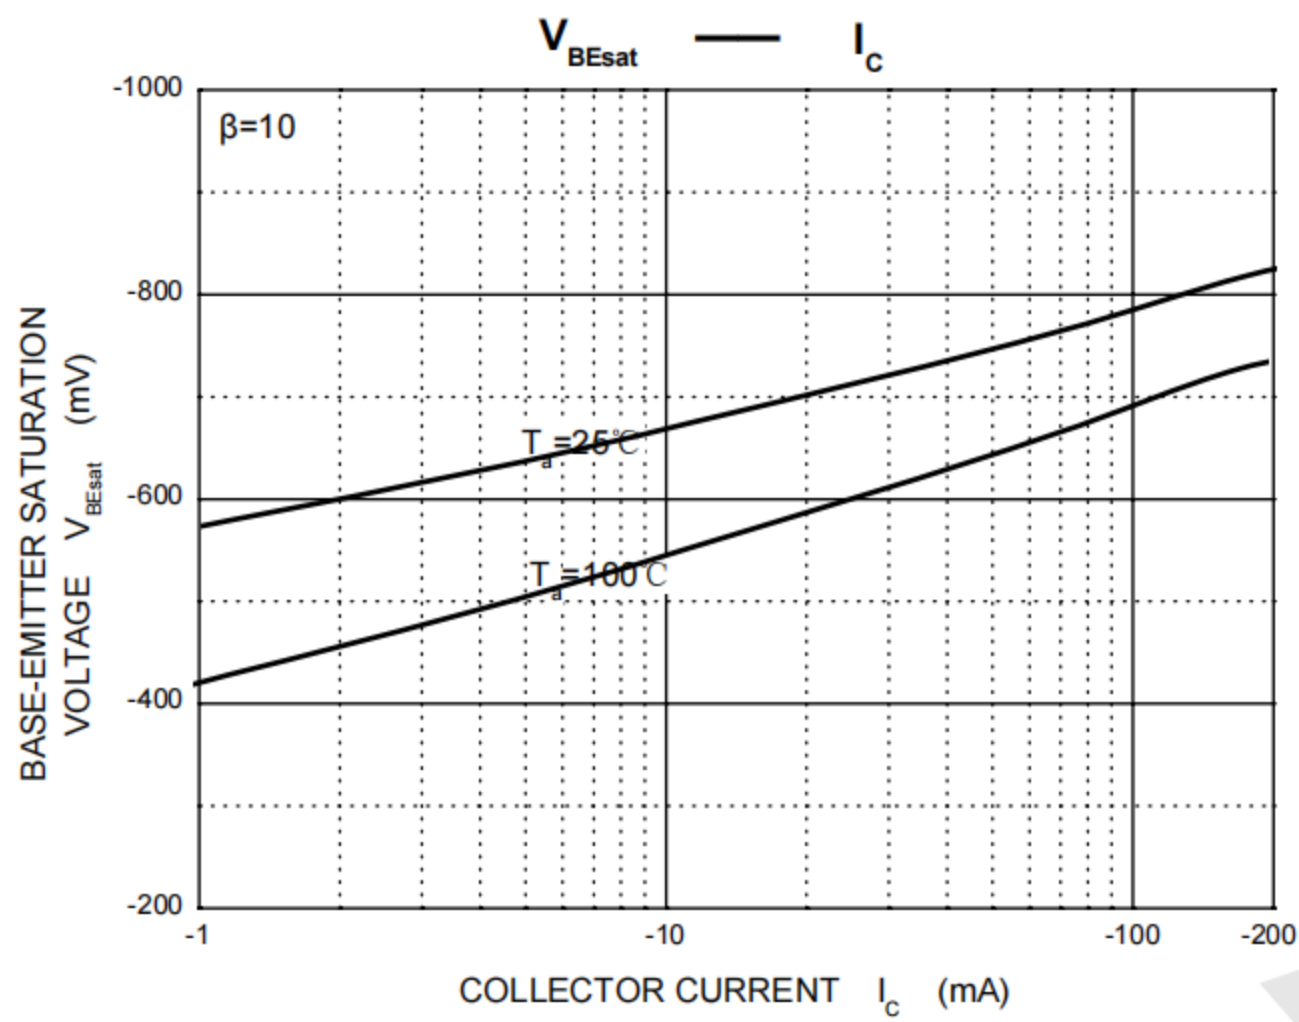



Outline Drawing - SOT363 (unit: mm)

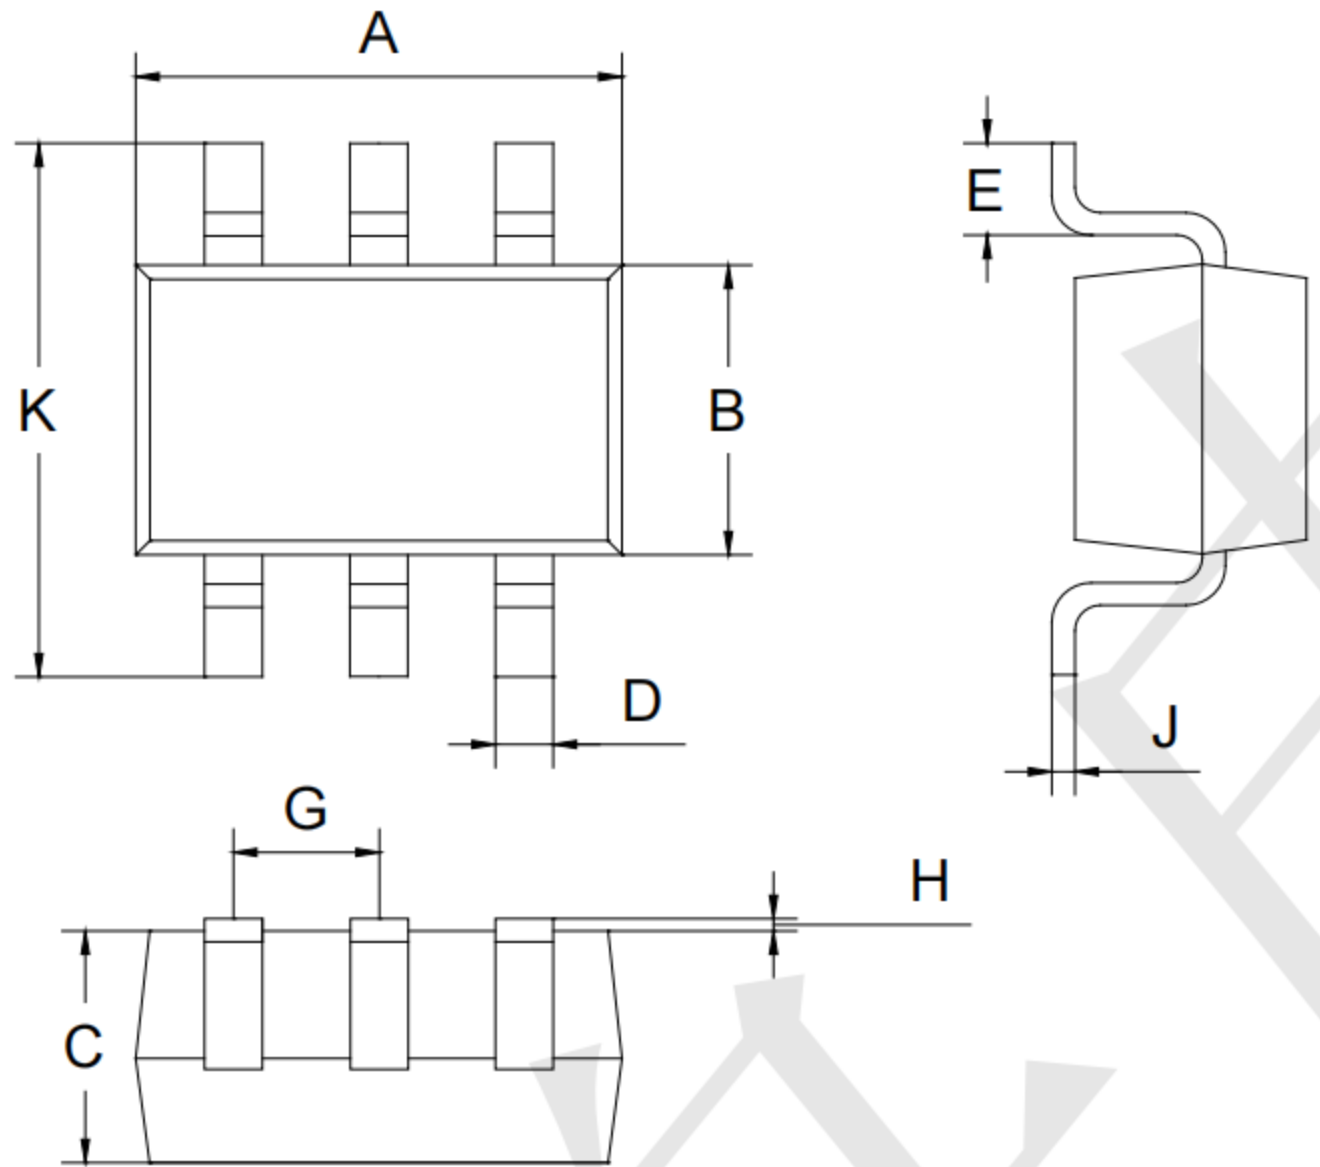

SOT-363		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout-SOT363 (unit: mm)

