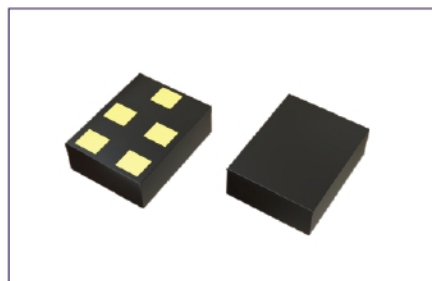
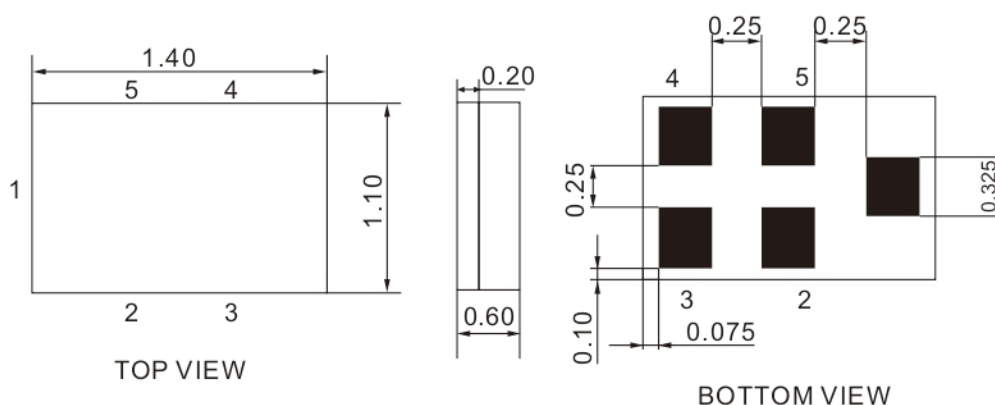


**SMD 1.4X1.1X0.6 CSP PACKAGE**
**PRODUCT FEATURES**

- Ultra Small size 1.4x1.1x0.6mm
- CSP process with chip scale package
- Standardization of small size
- Good stability and high reliability
- Mainly used in GPS navigation
- TDD/FDD communication and artificial intelligence chips
- RoHS compliant

**PRODUCT PHOTO**

**PRODUCT SPECIFICATIONS**

Item		Specifications	Unit
Frequency Range	$f_c$	800~3600MHz	MHz
Standard Frequency		1575.42, 1582.4, 1568, 2655	MHz
Useful Band Width		3,18,48 or specify	MHz
Insertion Loss ( min)	IL	0.9,1.3,1.8, 2.2 or specify	dB
VSWR(max)		2.0	dB
Operating Temperature Range		-40~+85	°C
Storage Temperature Range		-40~+85	°C

**PACKAGE OUTLINE / DIMENSIONS**


Pin No.	Description
1	Input
4	Output
2,3,5	To be grounded