


SMD 2.0x1.6 csp PACKAGE

PRODUCT FEATURES

- Small size 2.0x1.6x1.0mm
- The optional frequency can be customized
- High transmit and receive sensitivity
- High temperature resistance and impact resistance
- Good power and reliability
- RoHS compliant


PRODUCT PHOTO

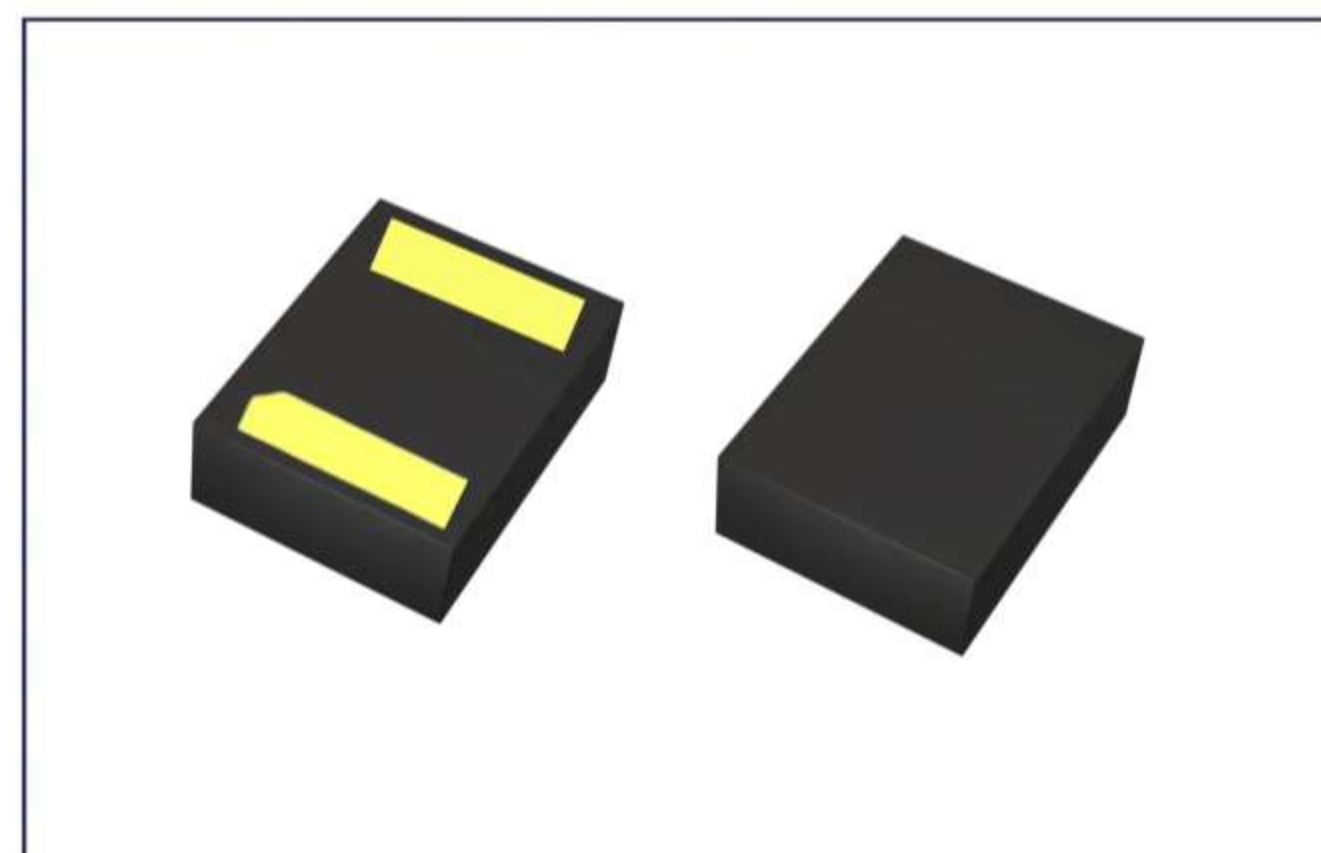

PRODUCT SPECIFICATIONS

Item			Minimum	Typical	Maximum	Unit
Frequency Range		f _c	154~1000MHz			MHz
Standard Frequency		f _c	303,315,390,433.92,435,72			MHz
Frequency Tolerance(at 25°C)		△f _c	±50, ±75, ±150 or specify			KHz
Insertion Loss (in 50ohm system, min)		IL	1.0,1.3,1.4, 1.5 or specify			dB
Temperature Stability	Turnover Temperature	T ₀	25	40	55	°C
	Turnover Frequency	f ₀		f _c		
	Frequency Temperature Coefficient	FTC		0.037		ppm/°C
Frequency Aging	Absolute Value during the First Year	f _A		≤10		ppm/yr
DC Insulation Resistance between Any Two Pins			1.0			MΩ
Operating Temperature Range			-40~+85			°C
Storage Temperature Range			-40~+85			°C

PACKAGE OUTLINE / DIMENSIONS

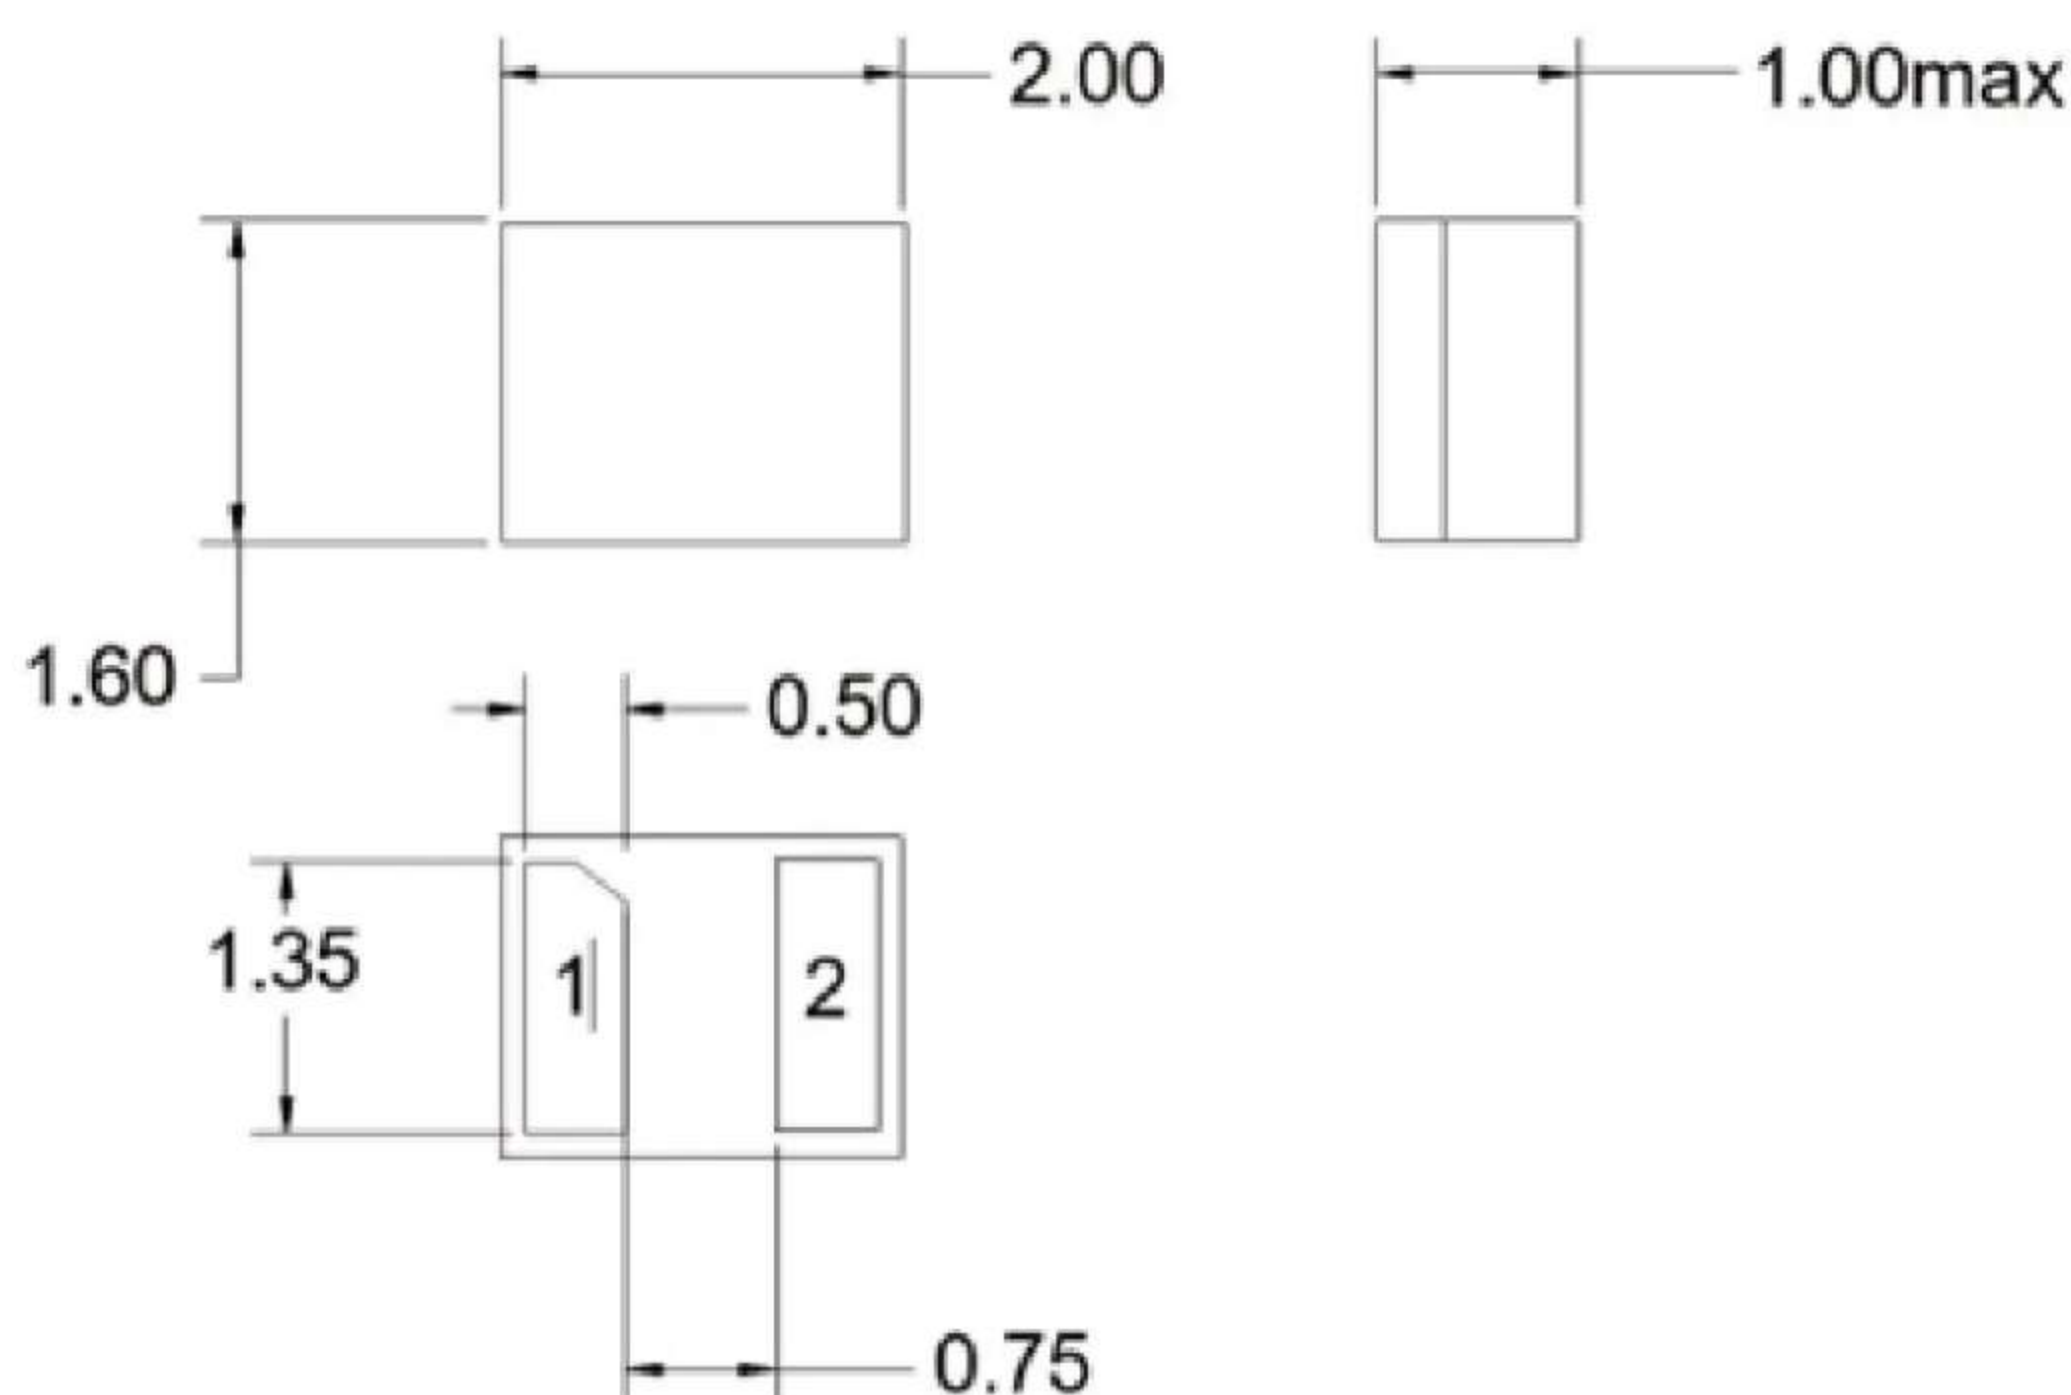

Pin No.	Description
1	Input/ Output
2	Output/ Input