
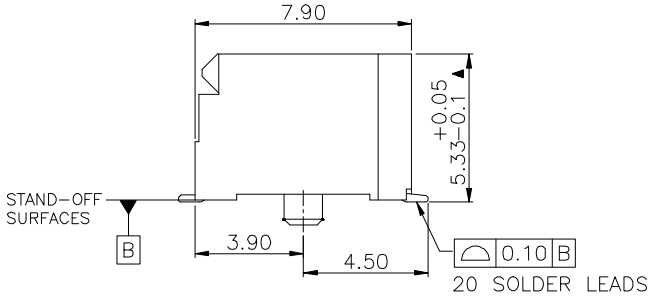
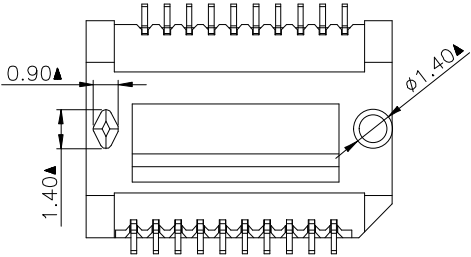
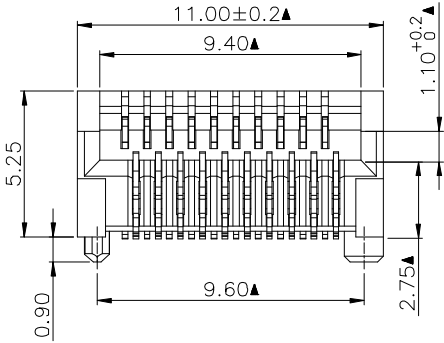


MECHANICAL DIMENSION


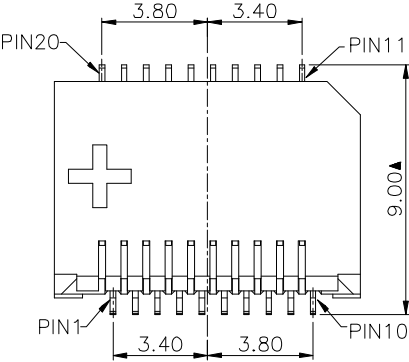


- NOTES:
1. MATERIAL:
HOUSING: LCP UL94V-0, BLACK
CONTACT: C5210R-EH, t=0.20mm
 2. DURABILITY TEST: 100 CYCLES MIN.
 3. SPECIFICATION:
DIELECTRIC STRENGTH: AC 300V/MINUTE
INSULATOR RESISTANCE: 500 Mohm MIN **RoHS**
CONTACT RESISTANCE: 40 mohm Max.
OPERATING TEMPERATURE: -40° ~ +85°

THIRD ANGLE PROJECTION		I		深圳磁联达电子有限公司 Shen zhen cnd-tek Electronics Co., Ltd Web: http://www.cd-tek.com	
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		TITLE		SFP+ 20PIN CONN	
DIMENSIONS: mm(INCH)		PART NO:		DRN BY:	DATE:
.X±0.20 .XXX±0.10		SFP20P		TINY	12-10-08
.XX±0.15		Product: PCB JACK RJ45 RJ11 USB CONNECTOR SFP CONNECTOR TRANSFORMER		APPD BY:	DATE:
SHEET NO.				JIM	12-10-08
1 OF 4				DWG NO:	REV:
				SFP2C21	A10

B

A

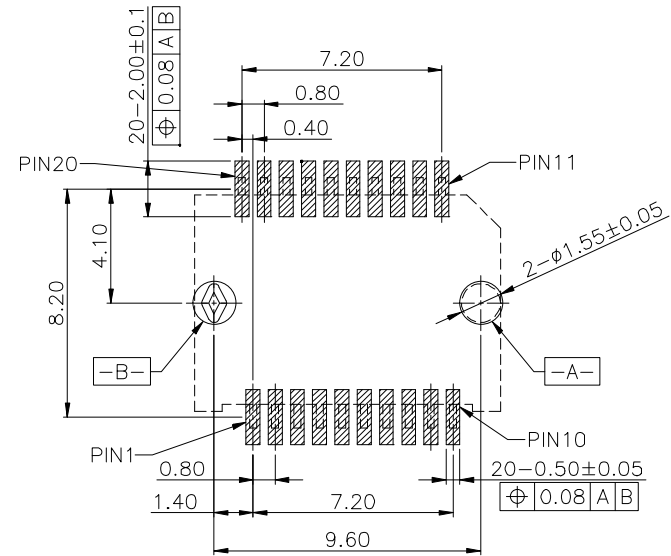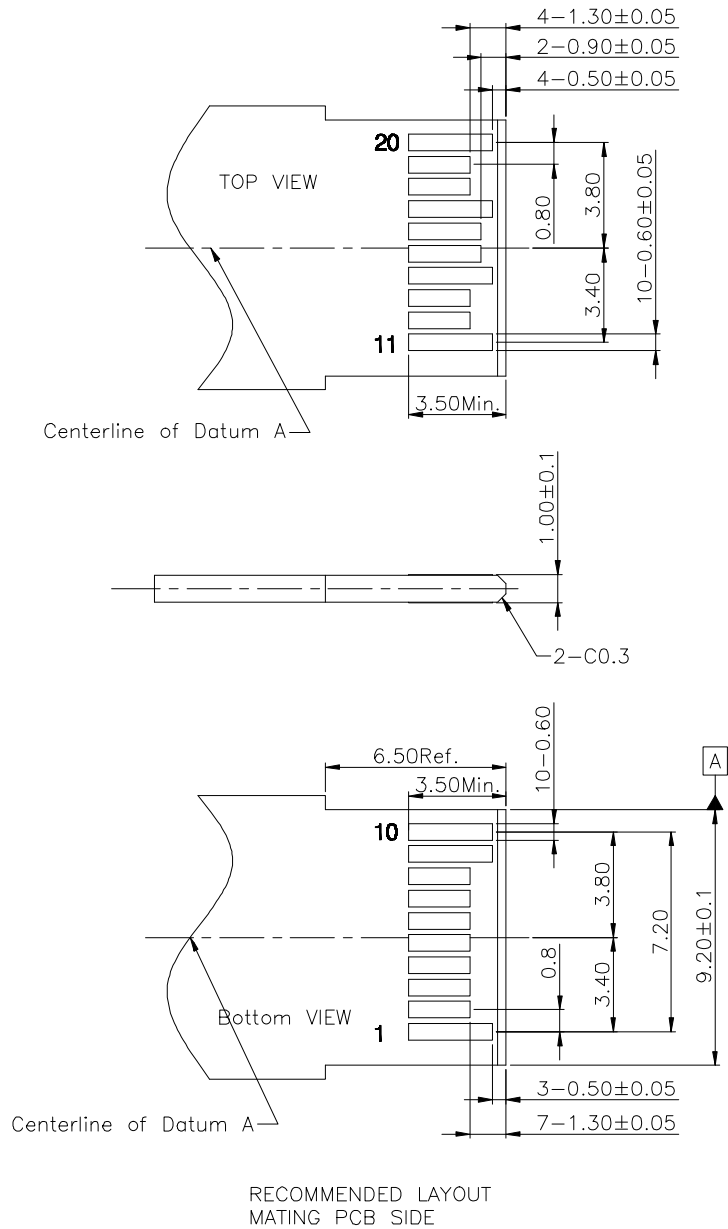

RECOMMENDED PCB LAYOUT(TOP VIEW)
(ALL TOLERANCES ARE ±0.05)



THIRD ANGLE PROJECTION		CND-tek 深圳磁联达电子有限公司 Shen zhen cnd-tek Electronics Co. , Ltd Web:http://www.cd-tek.com	
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		TITLE	
DIMENSIONS: mm(INCH) .X±0.20 .XXX±0.10 .XX±0.15		SFP+ 20PIN CONN	
SHEET NO.		PART NO	DRN BY:
1 OF 1		SFP20P	TONY
		Product: PCB JACK RJ45 RJ11 USB CONNECTOR SFP CONNECTOR TRANSFORMER	DATE:
		APPD BY:	12-10-08
		JIM	DATE:
		DWG NO:	12-10-08
		SFP2C21	REV:
			A10