

CHIP COMMON MODE CHOKE


CND-tek

- 1.1 High Common Mode Impedance at High Frequency.
- 1.2 Excellent Noise Suppression Performance.
- 1.3 Small Size and Low Profile, Surface Mount Type.
- 1.4 Operating Temperature range: -40~+125 °C
- 1.5 Storage temperature range: -40~+125 °C




Part Number	Electrical Specifications @25°C				
	Common mode Impedance (ohm $\pm 25\%$ @100M)	DCR (Ω Max)	Rated Current mA Max	Rated Volt (Vdc)	IR M(Ω Min)
WCM2012F2SF-801	800	0.88	300	125	10


MECHANICAL

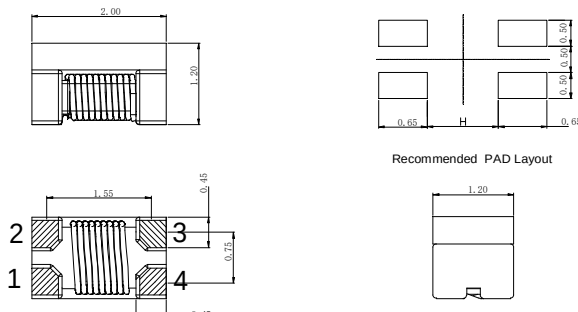

SCHEMATICS




IMPEDEANCE FREQUENCY




Unless otherwise specified all tolerances are: ± 0.25 in mm

TAPING AND PACKING

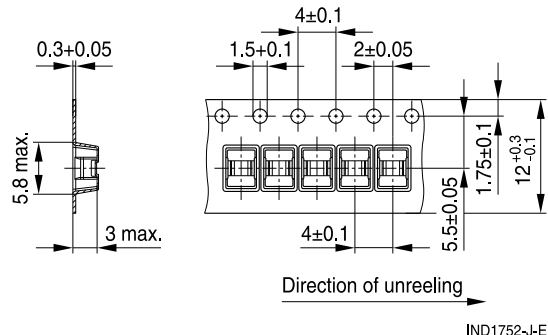

IND1752-J-E

Reel



IND1526-N

Dimensions in mm

Quantity (pcs):
3000 PCS PER REEL
10 REELS PER CARTON
30000 PCS PER CARTON