




SMD PULSE TRANSFORMER

Meets IEEE 802.3ab Standards.
Designed For 1000 BASE-T Applications, Surface Mount Type.
Operating Temperature Range: -40 °C to +85°C.
RoHS Compliant.


Electrical Specifications @25°C

Part Number	Turns Ratio (±5%)	OCL(uH Min) @100KHz, 0.1V With 8mA DC Bias	CWW(pF Max) @100KHz, 0.1V	DCR (Ω Max)	Insertion Loss (dB Max)	Return Loss (dB Min)	HI-POT (Vrms)
CL4532A-201 H	1CT:1CT	200	35	2.5	-2.0@0.5-150MHz	-18@0.5-40MHz -12+20*Log(F/80) @40.1-100MHz	1500

MECHANICAL

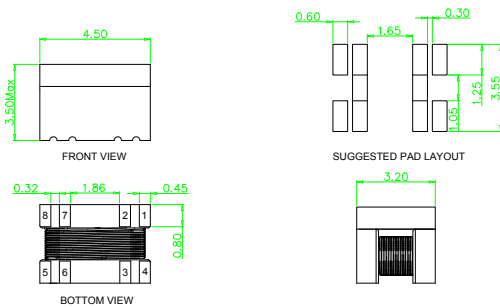


SCHEMATICS

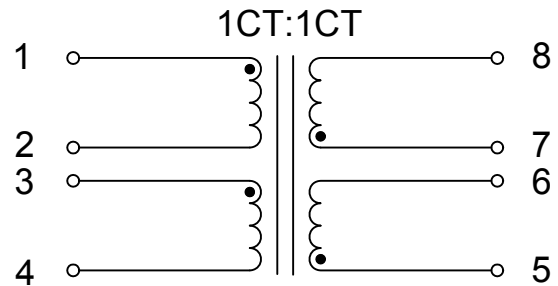

Unless otherwise specified all tolerances are: ±0.25 in mm

TAPING AND PACKING

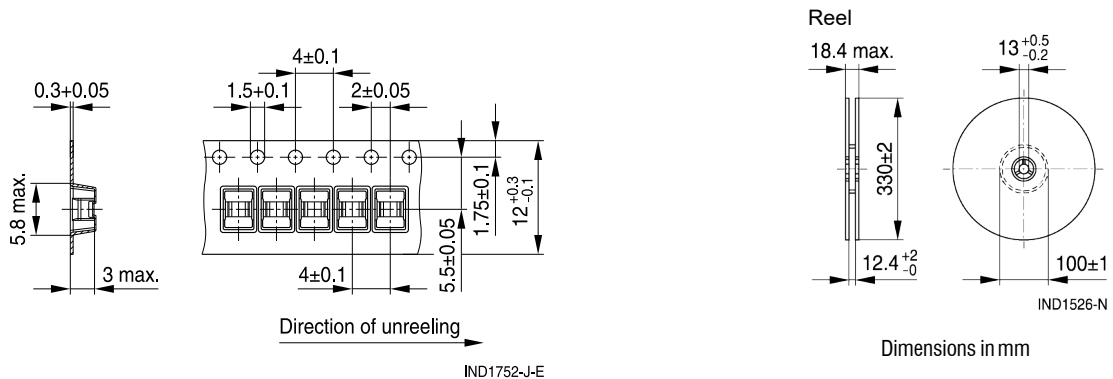

Quantity (pcs):
2400 PCS PER REEL
5 REELS PER CARTON
12000 PCS PER CARTON