





CHIP COMMON MODE CHOKE

High Common Mode Impedance at High Frequency.
Excellent Noise Suppression Performance.
Small Size and Low Profile, Surface Mount Type.
Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$
RoHS Compliant.

Part Number	Electrical Specifications @25°C						
	Inductance 100KHz 0.1V (μH Min)	Capacitance 100K 0.1V (pF Max)	DCR (Ω Max)	Rated Current mA Max	Rated Volt (Vdc)	Withstand Volt 1mA 1S (Vdc Max)	IR M(Ω Min)
CM1206SG600	60	25	1.7	200	50	125	10

MECHANICAL




Recommended PAD Layout




Unless otherwise specified all tolerances are $\pm 0.25\text{mm}$


SCHEMATICS




IMPEDEANCE FREQUENCY



TAPING AND PACKING

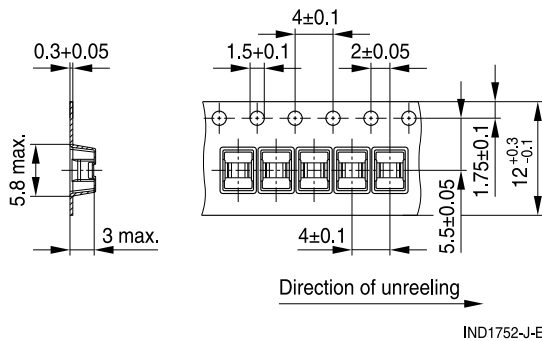

IND1752-J-E

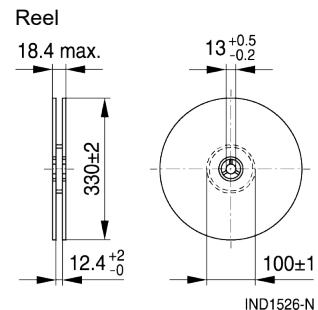

IND1526-N

Dimensions in mm

Quantity (pcs):
3000 PCS PER REEL
10 REELS PER CARTON
30000PCS PER CARTON

Shenzhen magnetic Lianda Electronics Co., LTD

Address: 505, West Block, No. 221, Niucheng Road, Niucheng Village, Baiwang Community, Xili Street, Nanshan District, Shenzhen
Tel: 0755-27652992 29016433 E-mail: sales1@cd-tek.com Website: www.cd-tek.com