

### Product Summary

- $BVCBO \geq 60V(I_C=0.1mA)$
- $BVCEO \geq 60V(I_C=10mA)$
- $I_C = 5.2A$

### Features

- Consumer electronics
- Voltage switching
- High Speed Switching



### Circuit diagram and pin information

#### SOT-89-3

1. BASE

2. COLLECTOR

3. EMITTER

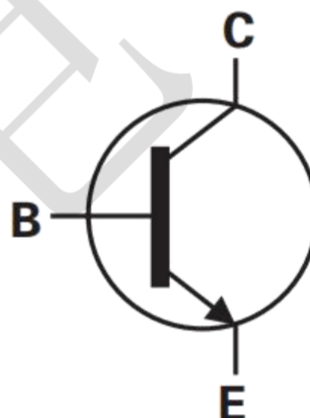

### Absolute Maximum Ratings

( $T_A=25^\circ C$  unless otherwise specified)

| PARAMETER                                                                             | SYMBOL    | LIMIT       | UNIT       |
|---------------------------------------------------------------------------------------|-----------|-------------|------------|
| Collector-Base Voltage                                                                | $V_{CBO}$ | 60          | V          |
| Collector-Emitter Voltage                                                             | $V_{CEO}$ | 60          | V          |
| Emitter-Base Voltage                                                                  | $V_{EBO}$ | 5           | V          |
| Collector Current (DC)                                                                | $I_C$     | 5.2         | A          |
| Collector Peak Current (Pulse)<br>Single pulse, $P_w \leq 380\mu s$ , Duty $\leq 2\%$ | $I_{CM}$  | 10          | A          |
| Power Total Dissipation @ $T_A=25^\circ C$                                            | $P_D$     | 500         | mW         |
| Maximum Operating Junction Temperature                                                | $T_J$     | +150        | $^\circ C$ |
| Storage Temperature Range                                                             | $T_{STG}$ | -55 to +150 | $^\circ C$ |

### Electrical Characteristics

(TA=25°C unless otherwise specified)







| PARAMETER                            | CONDITIONS                                                  | SYMBOL        | MIN | TYP | MAX   | UNIT |
|--------------------------------------|-------------------------------------------------------------|---------------|-----|-----|-------|------|
| <b>Static (Note 1)</b>               |                                                             |               |     |     |       |      |
| Collector-Base Breakdown Voltage     | $I_C = 0.1\text{mA}, I_E = 0$                               | $BV_{CBO}$    | 60  | --  | --    | V    |
| Collector-Emitter Breakdown Voltage  | $I_C = 10\text{mA}, I_B = 0$                                | $BV_{CEO}$    | 60  | --  | --    | V    |
| Emitter-Base Breakdown Voltage       | $I_E = 0.1\text{mA}, I_C = 0$                               | $BV_{EBO}$    | 5   | --  | --    | V    |
| Collector Cutoff Current             | $V_{CB} = 60\text{V}, I_E = 0$                              | $I_{CBO}$     | --  | --  | 100   | nA   |
| Emitter Cutoff Current               | $V_{EB} = 5\text{V}, I_C = 0$                               | $I_{EBO}$     | --  | --  | 100   | nA   |
| Collector-Emitter Saturation Voltage | $I_C = 0.5\text{A}, I_B = 0.05\text{A}$                     | $V_{CE(SAT)}$ | --  | --  | 0.035 | V    |
| Base-Emitter Saturation Voltage      | $I_C = 1\text{A}, I_B = 0.05\text{A}$                       | $V_{BE(SAT)}$ | --  | --  | 0.07  | V    |
| DC Current Transfer Ratio            | $V_{CE} = 2\text{V}, I_C = 0.5\text{A}$                     | $h_{FE1}$     | 300 | 520 | --    |      |
|                                      | $V_{CE} = 2\text{V}, I_C = 1\text{A}$                       | $h_{FE2}$     | 300 | 500 | --    |      |
|                                      | $V_{CE} = 2\text{V}, I_C = 2\text{A}$                       | $h_{FE3}$     | 250 | 470 | --    |      |
|                                      | $V_{CE} = 2\text{V}, I_C = 4\text{A}$                       | $h_{FE4}$     | 150 | 250 | --    |      |
|                                      | $V_{CE} = 2\text{V}, I_C = 5\text{A}$                       | $h_{FE5}$     | 80  | 120 | --    |      |
| <b>Dynamic (Note 2)</b>              |                                                             |               |     |     |       |      |
| Transition Frequency                 | $V_{CE} = 10\text{V}, I_C = 100\text{mA}, f = 50\text{MHz}$ | $f_T$         | 30  | --  | --    | MHz  |
| Collector Output Capacitance         | $V_{CB} = 10\text{V}, I_E = 0\text{A}, f = 10\text{MHz}$    | $C_{ob}$      | --  | 25  | --    | pF   |

Note:

1. Pulse test:  $\leq 380\mu\text{s}$ , duty cycle  $\leq 2\%$


2. For DESIGN AID ONLY, not subject to production testing

**Typical Performance Characteristics ( $T_A=25^\circ\text{C}$ )**

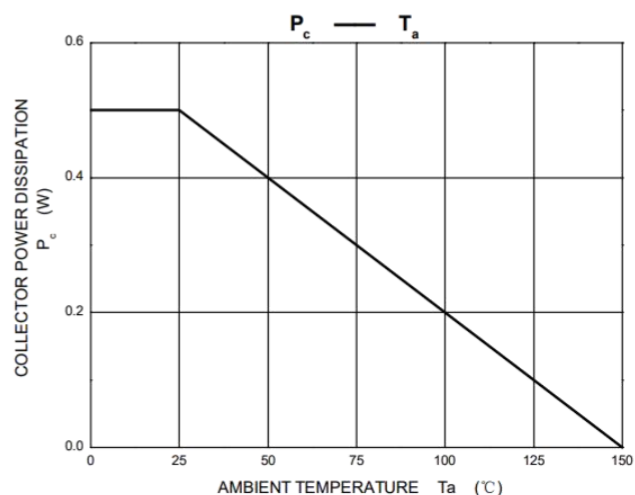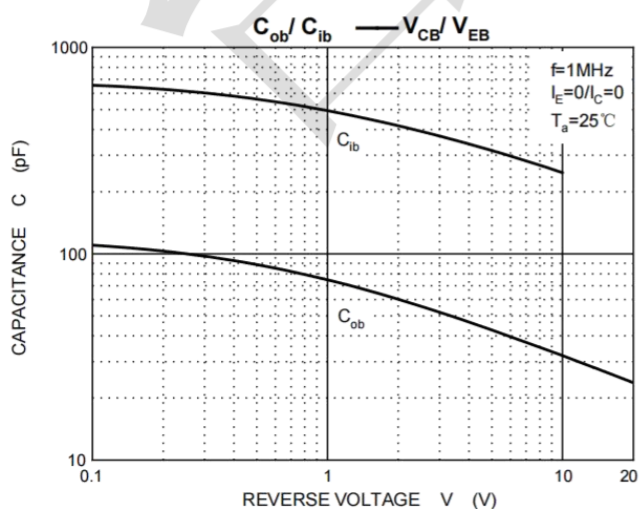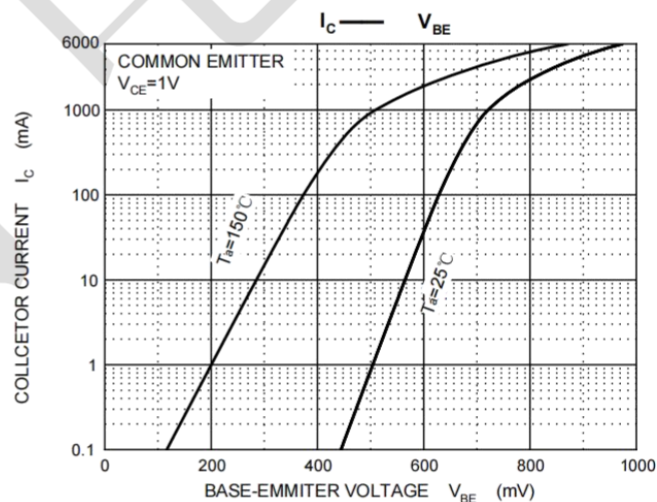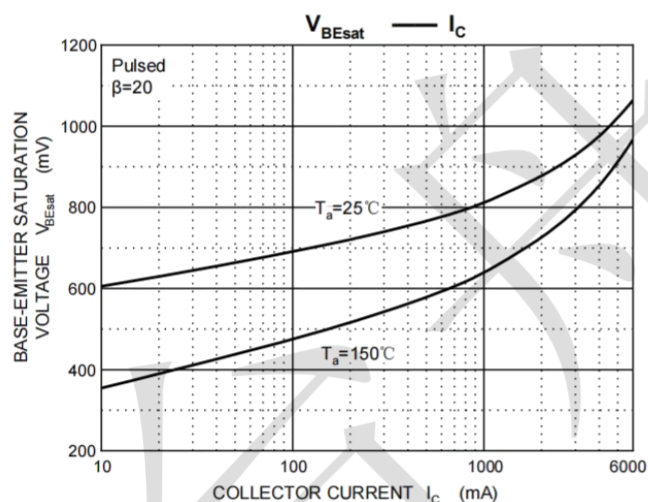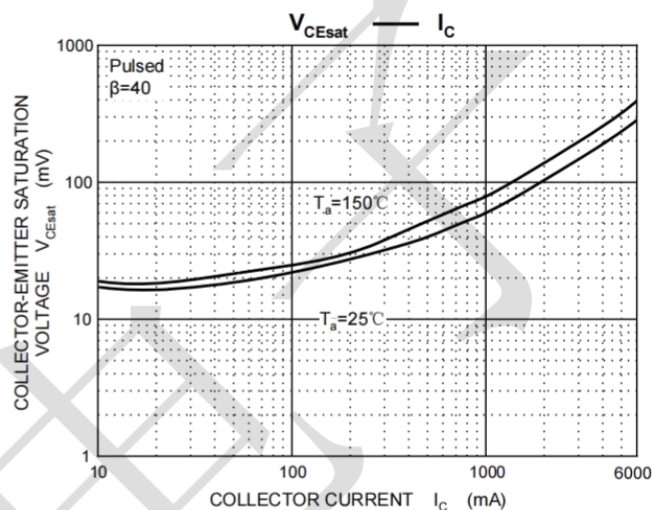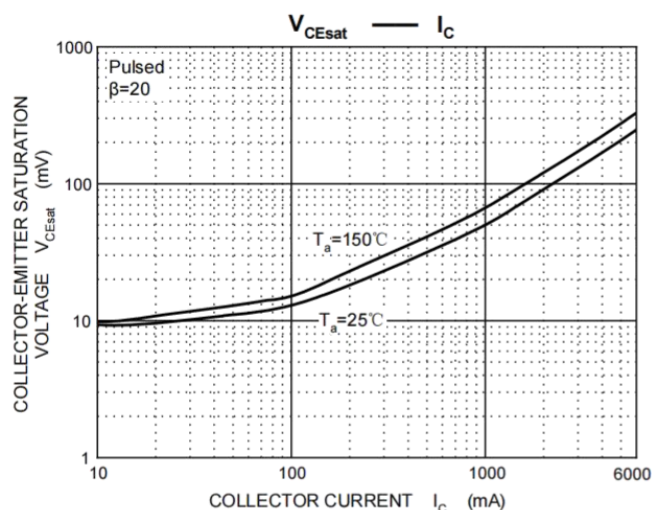

**Package Outline Dimensions (unit: mm)**

**SOT-89-3**

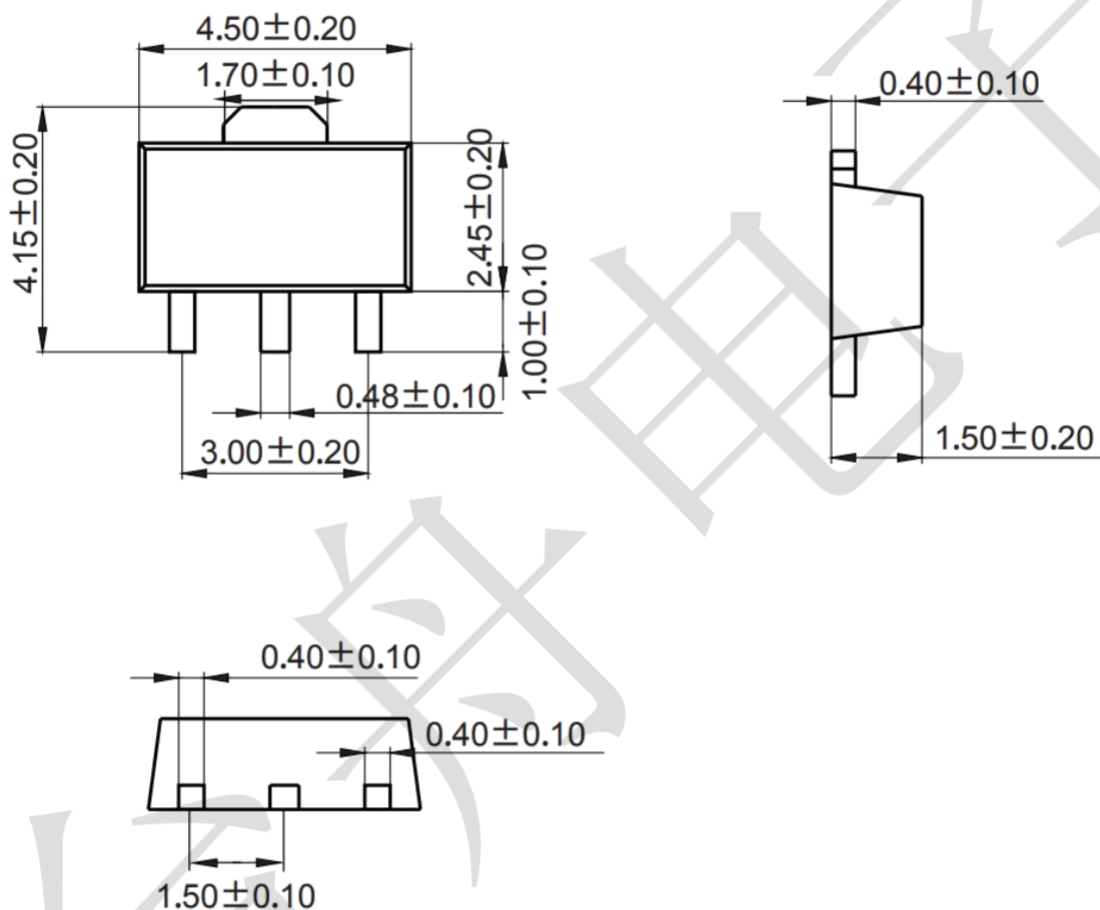

**Mounting Pad Layout (unit: mm)**

