




HE8050

NPN SILICON TRANSISTOR

LOW VOLTAGE HIGH
CURRENT SMALL SIGNAL
NPN TRANSISTOR

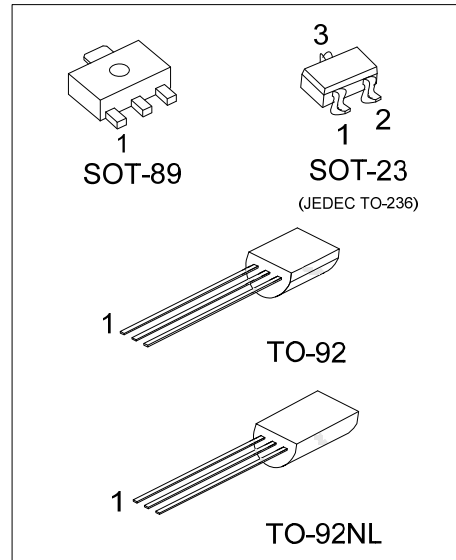

■ DESCRIPTION

The UTC **HE8050** is a low voltage high current small signal NPN transistor, designed for Class B push-pull 2W audio amplifier for portable radio and general purpose applications.

■ FEATURES

- *Collector current up to 1.5A
- *Collector-Emitter voltage up to 25V
- *Complimentary to UTC HE8550

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
HE8050L-x-AB3-R	HE8050G-x-AB3-R	SOT-89	B	C	E	Tape Reel
HE8050L-x-AE3-R	HE8050G-x-AE3-R	SOT-23	B	E	C	Tape Reel
HE8050L-x-T92-B	HE8050G-x-T92-B	TO-92	E	C	B	Tape Box
HE8050L-x-T92-K	HE8050G-x-T92-K	TO-92	E	C	B	Bulk
HE8050L-x-T9N-B	HE8050G-x-T9N-B	TO-92NL	E	C	B	Tape Box
HE8050L-x-T9N-K	HE8050G-x-T9N-K	TO-92NL	E	C	B	Bulk

Note: Pin Assignment: B: Base C: Collector E: Emitter

<p>HE8050G-x-AB3-R</p> <p>(1) Packing Type (2) Package Type (3) Rank (4) Green Package</p>	<p>(1) R: Tape Reel, B: Tape Box, K: Bulk (2) AB3: SOT-89, AE3: SOT-23, T92: TO-92, T9N: TO-92NL (3) x: refer to Classification of h_{FE2} (4) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---

■ MARKING

SOT-89	SOT-23
<p>□□□□ → Date Code HE8050□ → L: Lead Free G: Halogen Free</p>	<p>DA□ → L: Lead Free G: Halogen Free</p>
TO-92	TO-92NL
<p>UTC HE8050□ → L: Lead Free G: Halogen Free □□□ → Date Code</p>	<p>L: Lead Free G: Halogen Free Date Code ← UTC HE8050□ □□□□ ←</p>

HE8050

NPN SILICON TRANSISTOR

■ ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$, unless otherwise specified.)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	40	V
Collector-Emitter Voltage		V_{CEO}	25	V
Emitter-Base Voltage		V_{EBO}	6	V
Collector Dissipation	SOT-23	P_C	350	mW
	SOT-89		500	mW
	TO-92		1	W
	TO-92NL			
Collector Current		I_C	1.5	A
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Case	SOT-23	θ_{JC}	110	$^\circ\text{C/W}$
	SOT-89		40	
	TO-92		80	
	TO-92NL		78	







■ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=100\mu\text{A}, I_E=0$	40			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=2\text{mA}, I_B=0$	25			V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E=100\mu\text{A}, I_C=0$	6			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=35\text{V}, I_E=0$			100	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=6\text{V}, I_C=0$			100	nA
DC Current Gain	h_{FE1}	$V_{CE}=1\text{V}, I_C=5\text{mA}$	45	135		
	h_{FE2}	$V_{CE}=1\text{V}, I_C=100\text{mA}$	85	160	500	
	h_{FE3}	$V_{CE}=1\text{V}, I_C=800\text{mA}$	40	110		
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=800\text{mA}, I_B=80\text{mA}$			0.5	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=800\text{mA}, I_B=80\text{mA}$			1.2	V
Base-Emitter Saturation Voltage	V_{BE}	$V_{CE}=1\text{V}, I_C=10\text{mA}$			1.0	V
Current Gain Bandwidth Product	f_T	$V_{CE}=10\text{V}, I_C=50\text{mA}$	100			MHz
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$		9.0		pF


■ CLASSIFICATION of h_{FE2}

RANK	C	D	E
RANGE	120-200	160-300	250-500

TYPICAL CHARACTERISTICS

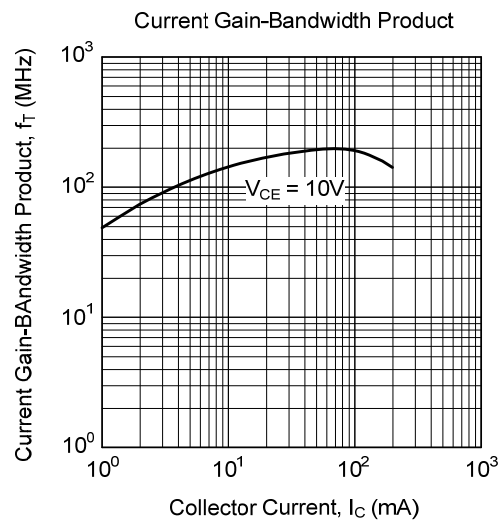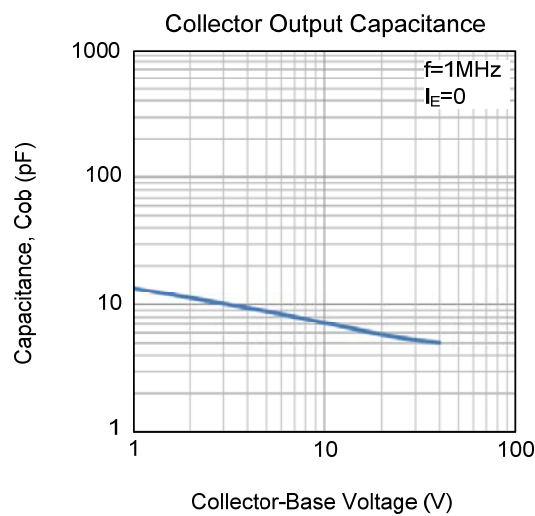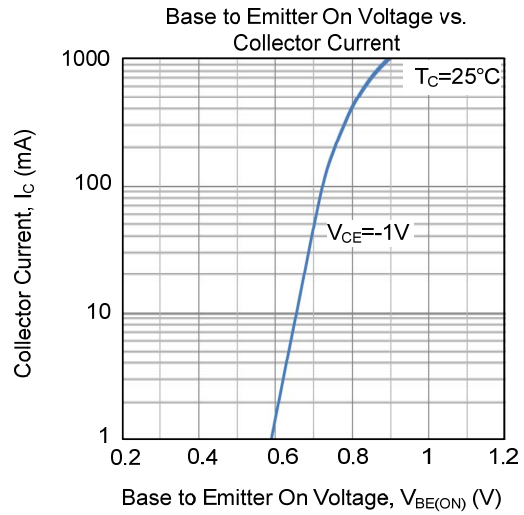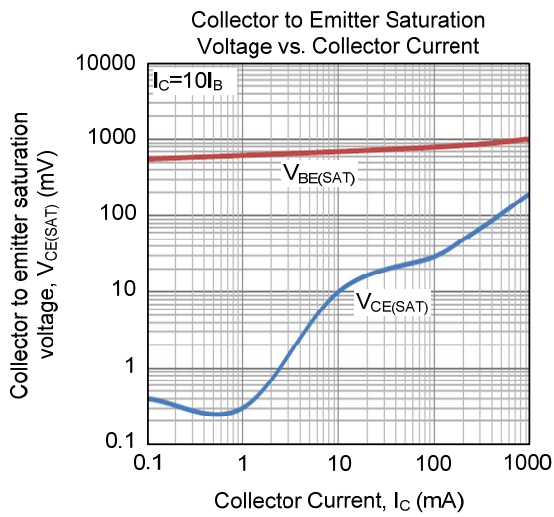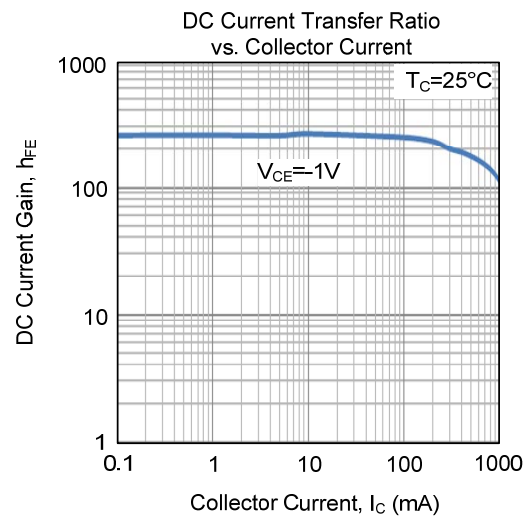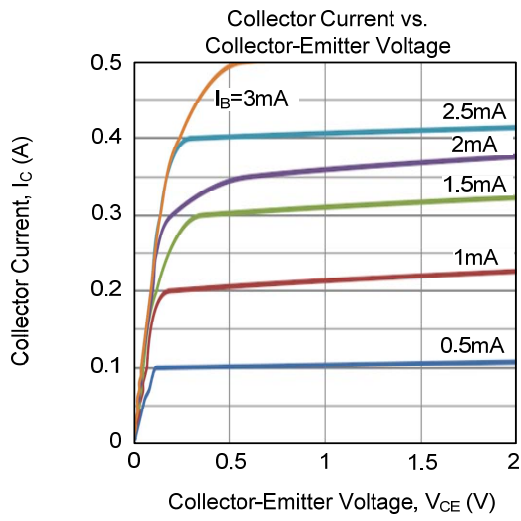

■ TYPICAL CHARACTERISTICS (Cont.)

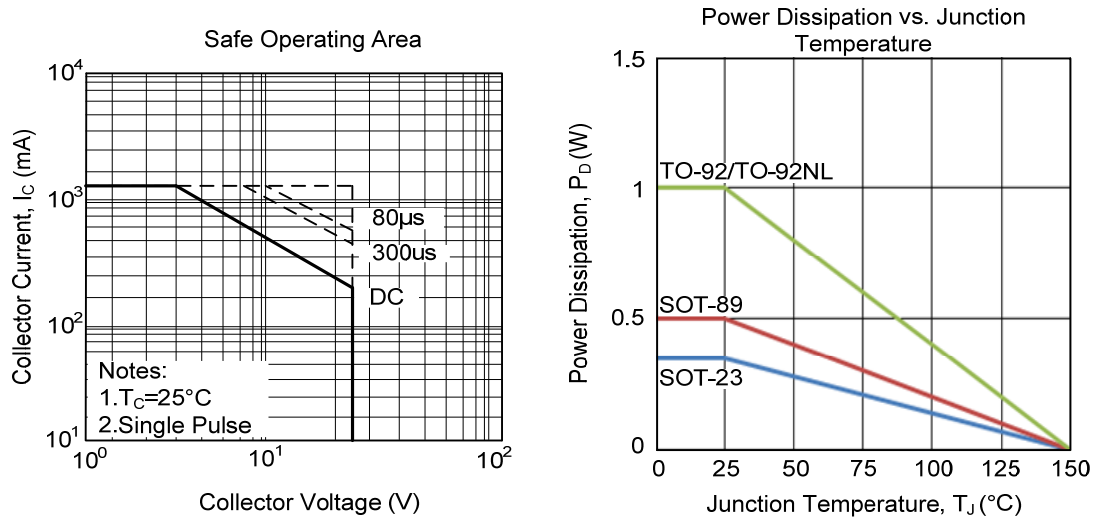

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.