

Features


- General rectification
- Low V_F ; Low I_R
- High reliability

Applications


surface mount schottky barrier rectifier

Ordering Information

Shipping Qty:3000/7inch Tape& Reel

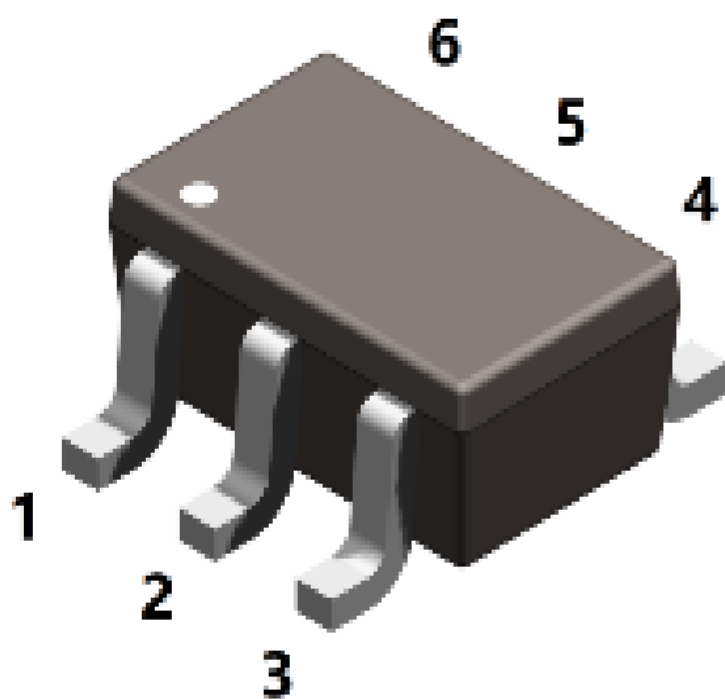

SOT363

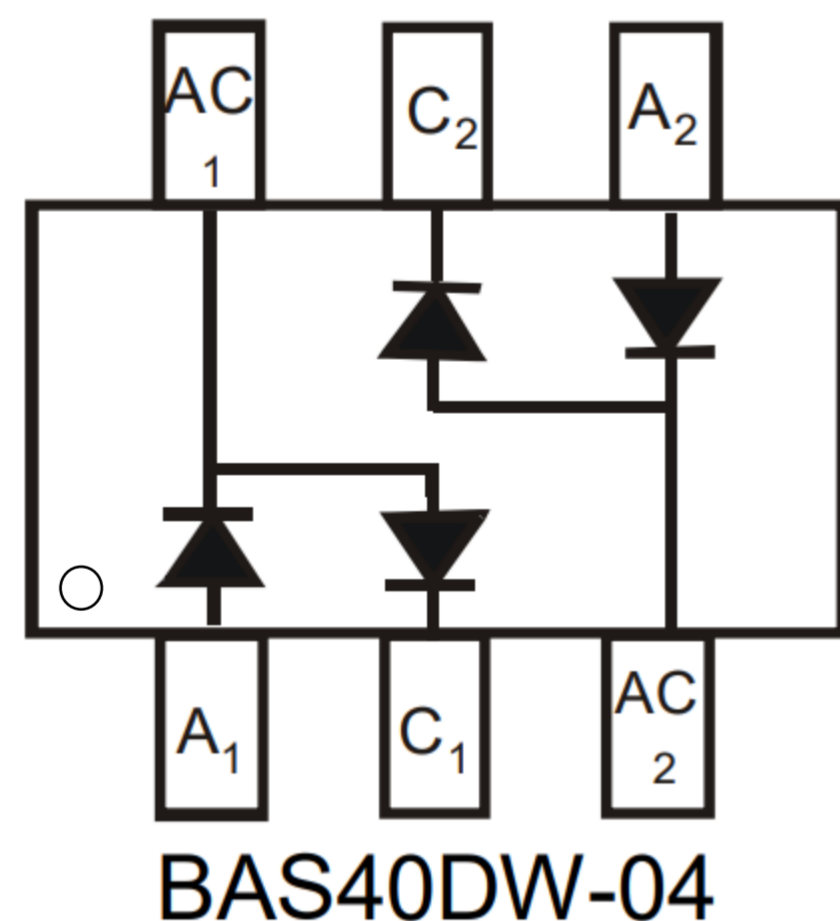

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limits	Unit
Peak Repetitive Peak reverse voltage Working Peak Reverse Voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_R	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Forward Continuous Current *	I_F	200	mA
Non-Repetitive peak forward surge current @8.3ms	I_{FSM}	600	mA
Power Dissipation *	P_d	200	mW
* part mounted on FR-4 board with recommended pad layout			

Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)





Parameter	Symbol	Limits	Unit
Thermal resistance junction to ambient air	$R_{\theta JA}$	500	$^\circ\text{C/W}$
Operating Temperature Range	T_j	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage *1	V_F	$I_F=1\text{mA}$			0.38	V
		$I_F=40\text{mA}$			1	V
Reverse current *2	I_R	$V_R=30\text{V}$			0.2	μA
Capacitance Between Terminals	C_T	$V_R=0\text{V}, f=1\text{MHz}$		2.5	5	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10\text{mA}$ $I_{rr}=1.0\text{mA}, R_L=100\Omega$			5	ns

*1: pulse test, $t_p \leq 300\mu\text{s}$
*2: pulse test, $t_p \leq 5\text{ms}$

Typical Electrical Characteristic Curves

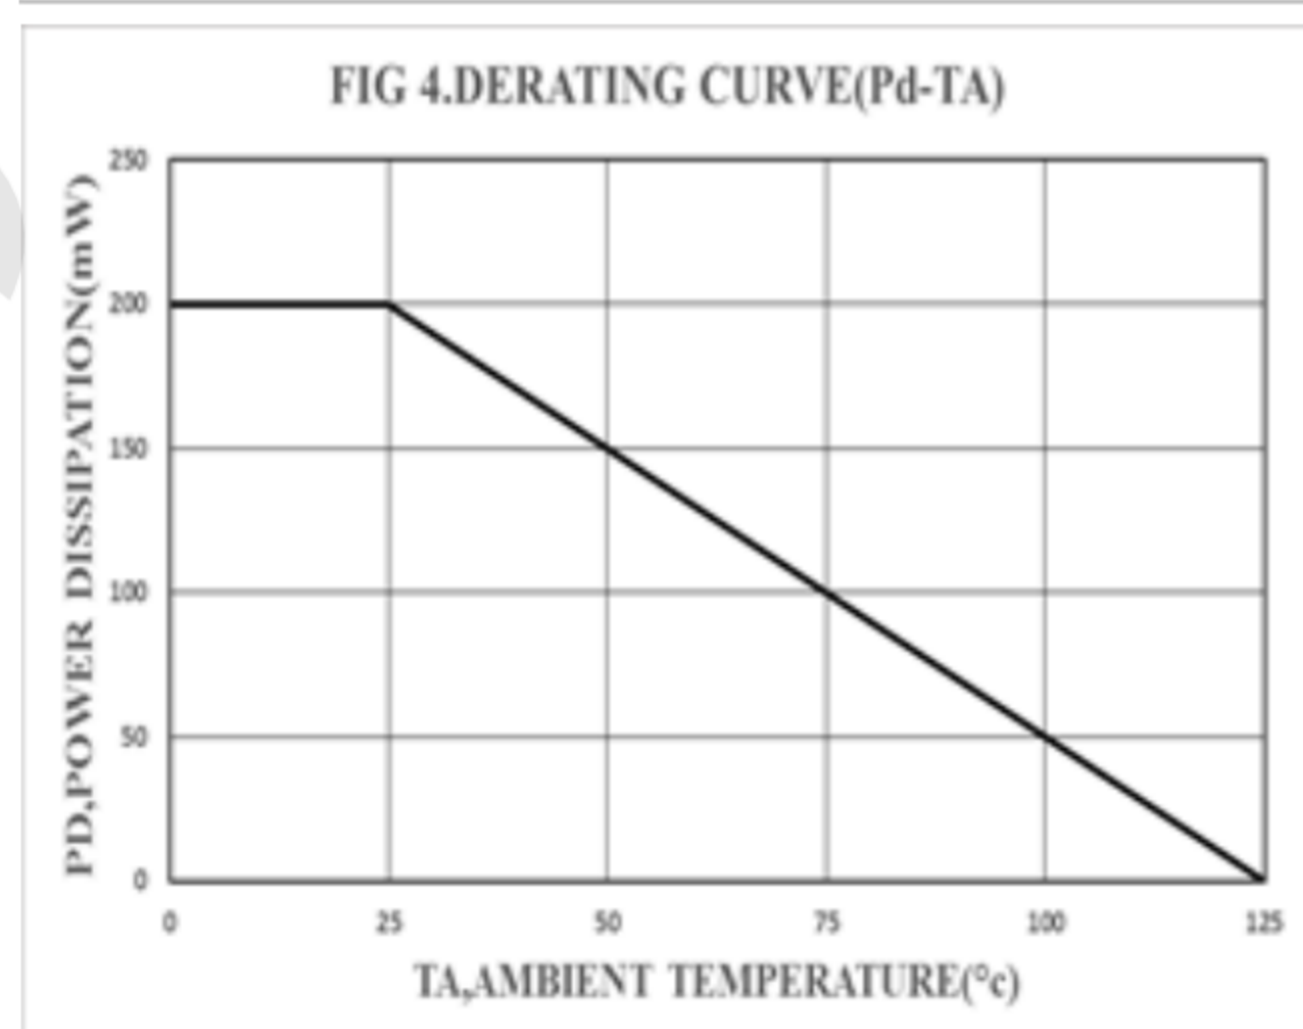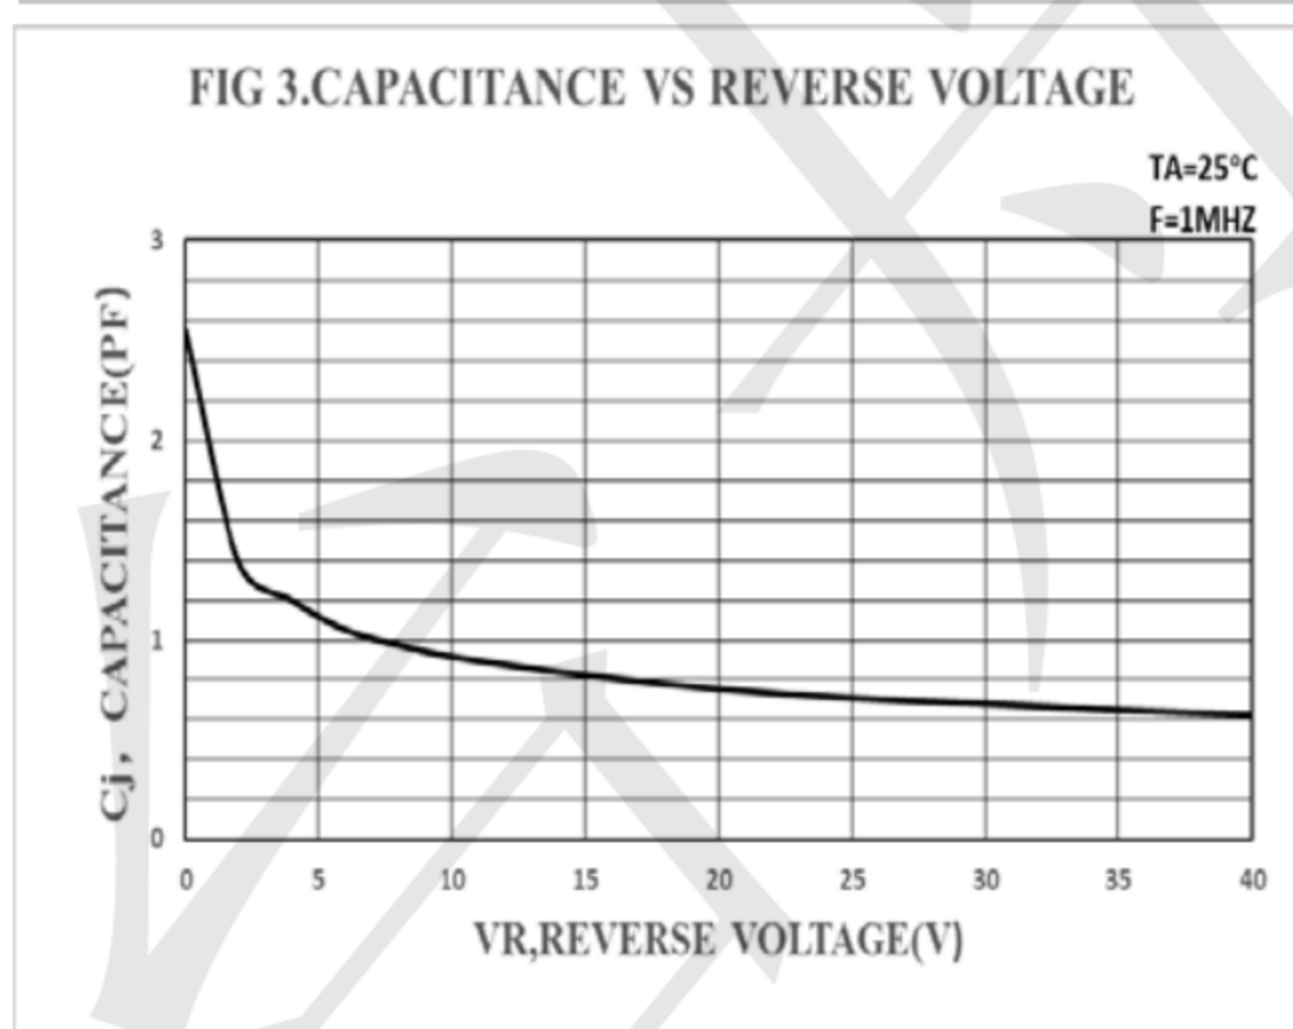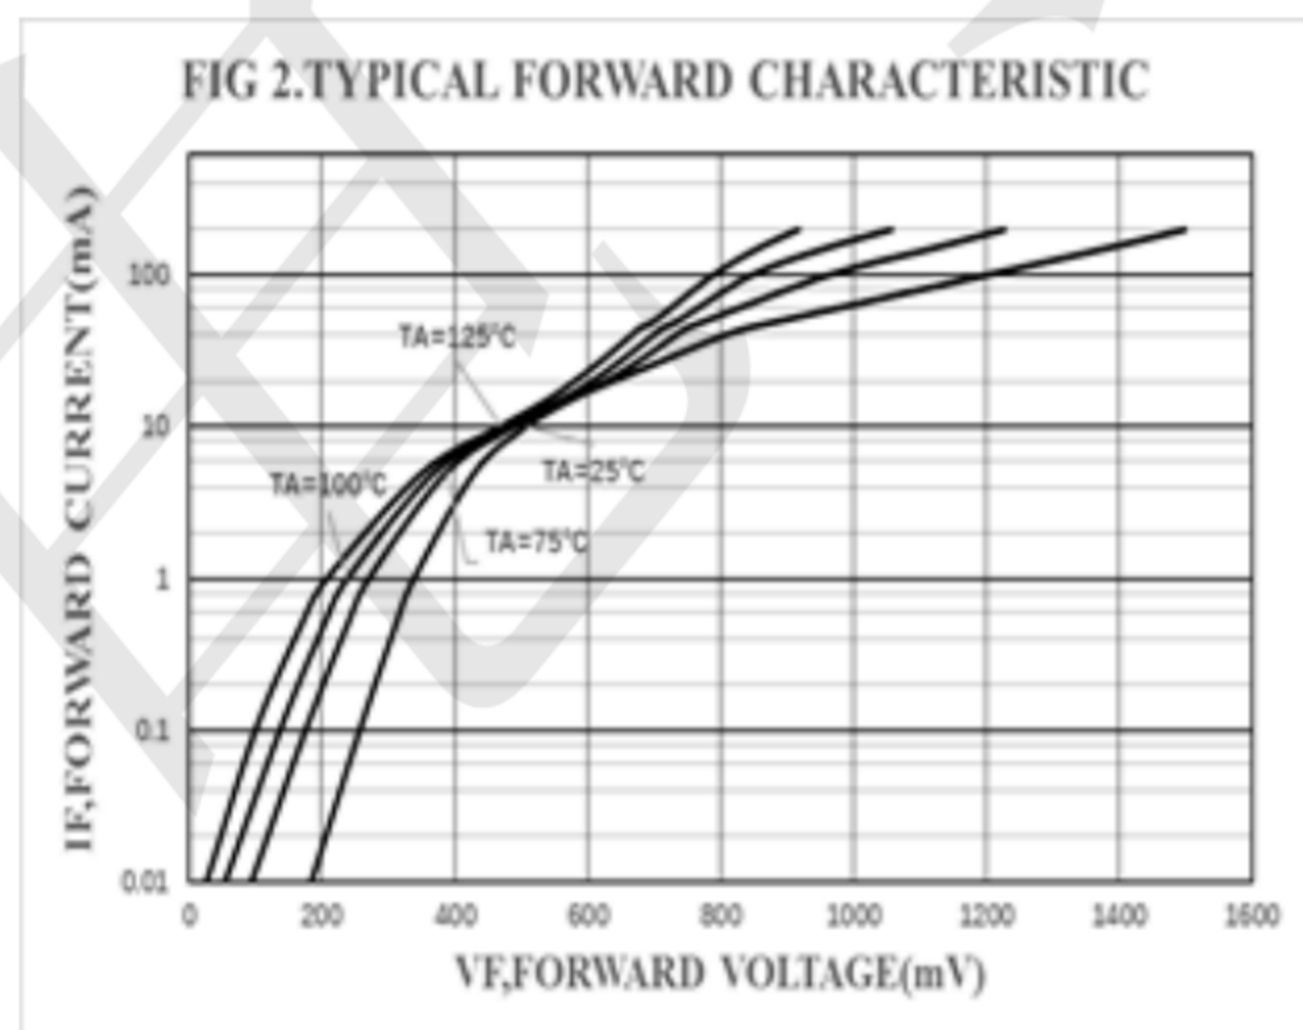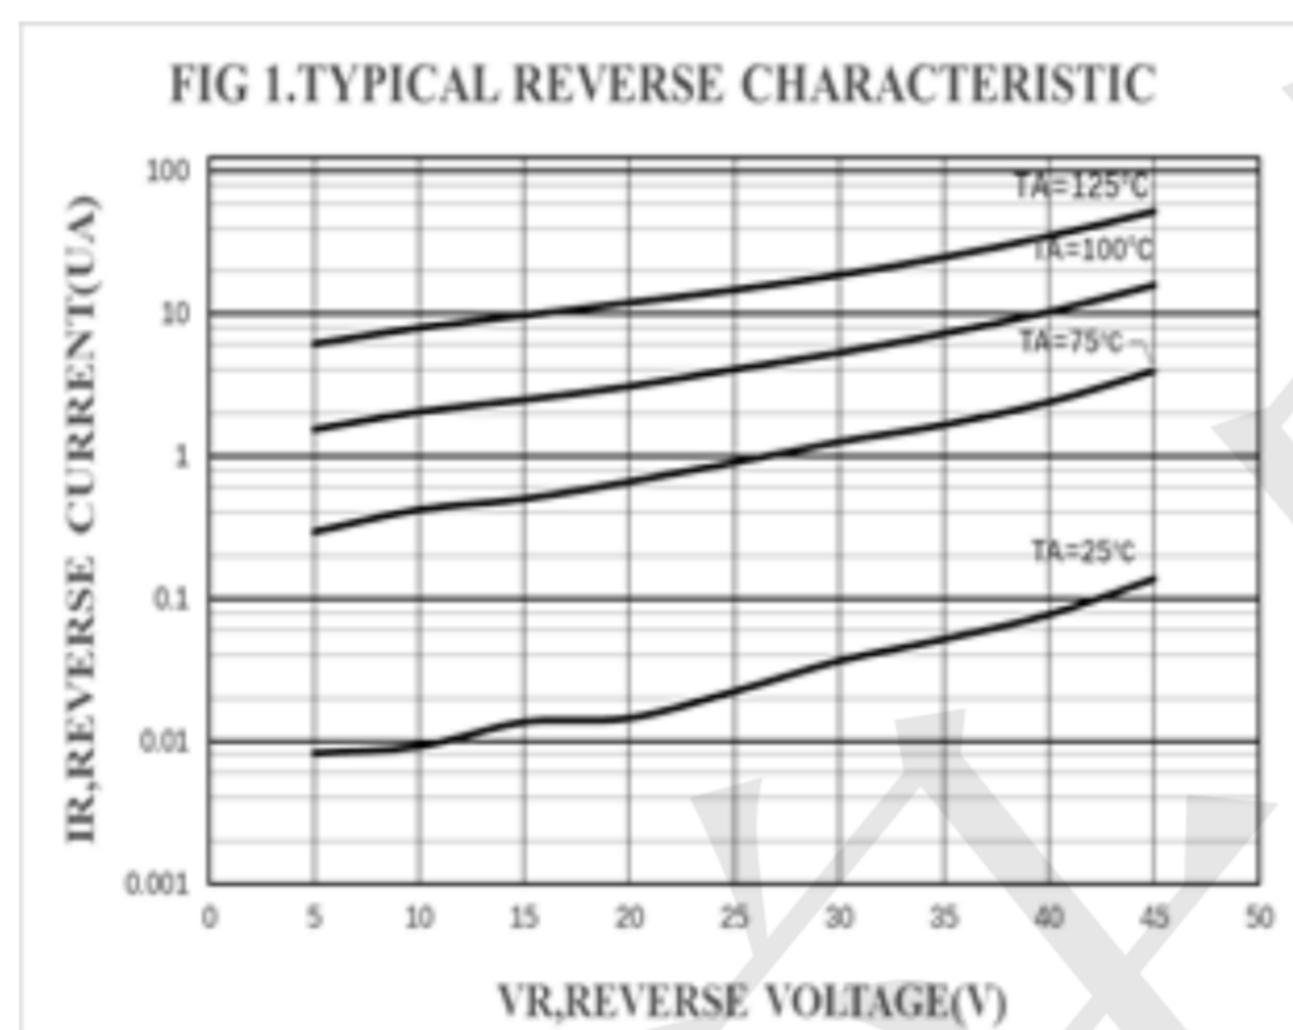

Outline Drawing - SOT363 (unit: mm)

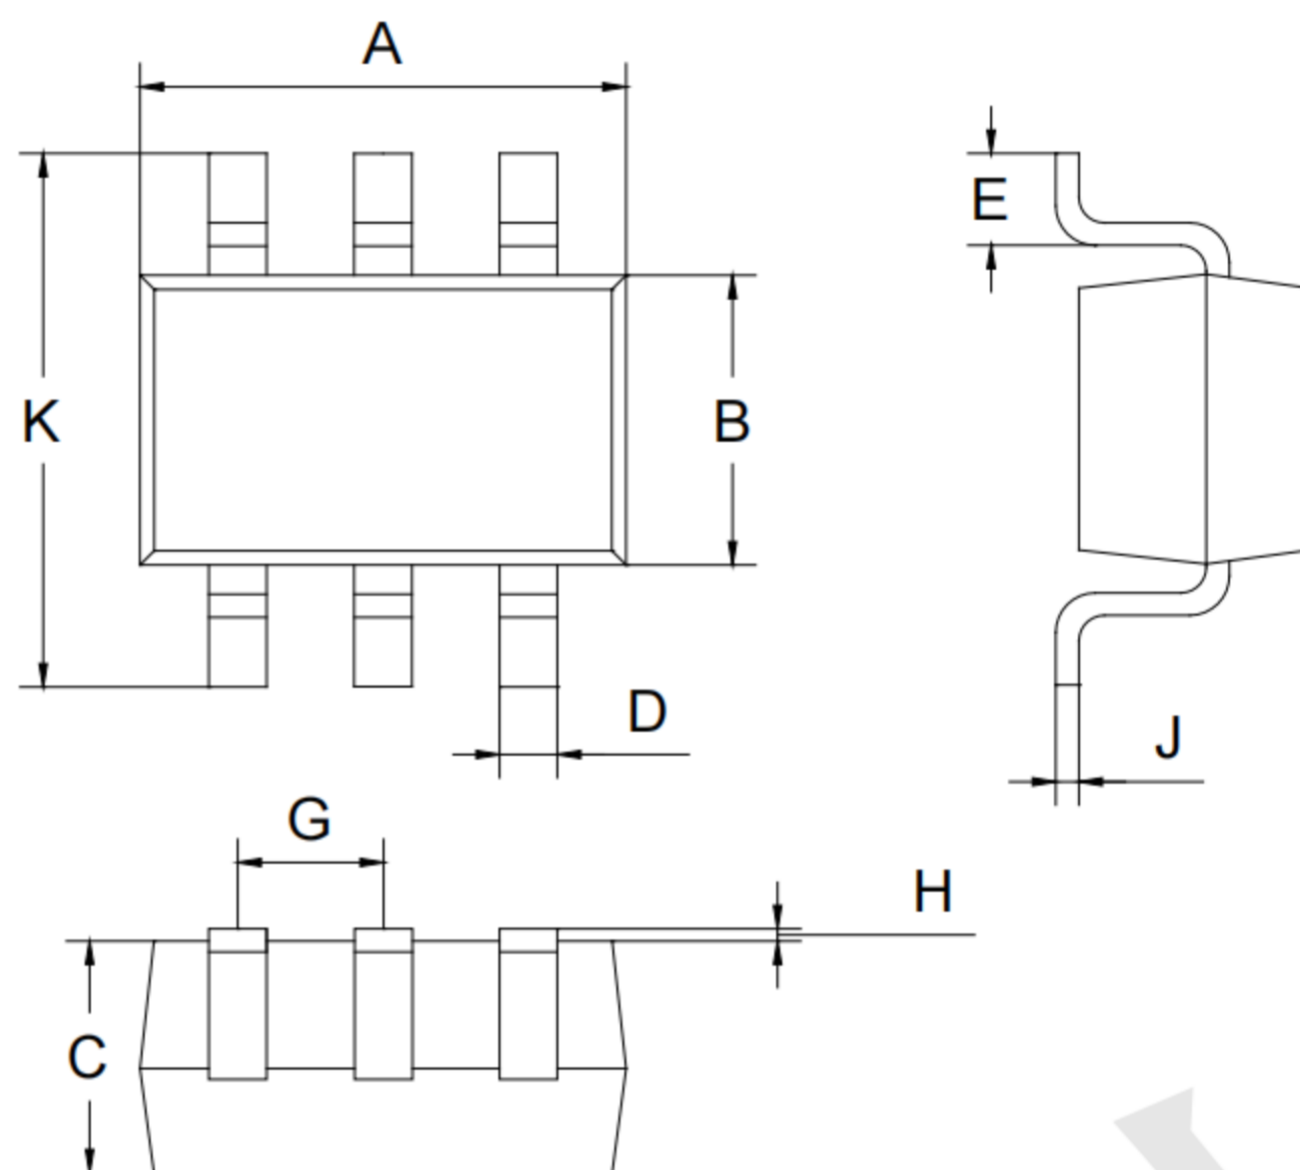

SOT-363		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout-SOT363 (unit: mm)

